





DG1.5T DG2.5T DG4T
DG6T DG10T DG16T
DG25T DG35T

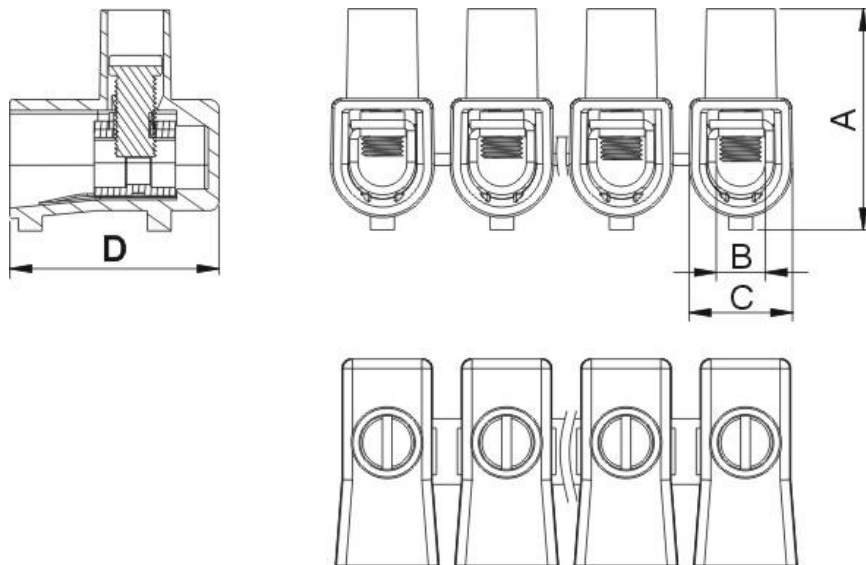

Model	Wire range	IEC (datasheet)		UL (datasheet)		Dimensions (mm/in.)				
		Rated current	Rated voltage	Rated current	Rated voltage	Unit	A	B	C	D
DG1.5T	2x1.5mm ²	17.5A	450V	15A	300V	(mm)	16.0	3.3*3.5	10.0	15.0
DG2.5T	2x2.5mm ²	24.0A	450V	20A	300V	(mm)	18.5	4.1*4.2	8.7	17.8
DG4T	2x4.0mm ²	32.0A	450V	30A	300V	(mm)	20.0	4.7*4.9	9.8	19.3
DG6T	2x6.0mm ²	41.0A	450V	30A	300V	(mm)	24.4	5.8*6.0	11.8	22.5
DG10T	2x10.0mm ²	57.0A	450V	50A	600V	(mm)	29.8	7.5*7.7	14.8	26.0
DG16T	2x16.0mm ²	76.0A	450V	65A	600V	(mm)	34.2	9.5*9.7	19.8	31.0
DG25T	2x25.0mm ²	101.0A	450V	85A	600V	(mm)	40.0	12.0*12.2	22.0	38.0
DG35T	2x35.0mm ²	125.0A	450V	100A	600V	(mm)	43.0	14.0*14.2	24.8	46.0

- ※ Housing material: PC UL94V-2
- ※ Current carrier: Steel, Cr³⁺Zn-plated
- ※ Screws: Steel, Cr³⁺Zn-plated
- ※ Ambient temperature: -40°C~T85°C
- ※ Poles available: 10P

HOW TO ORDER :

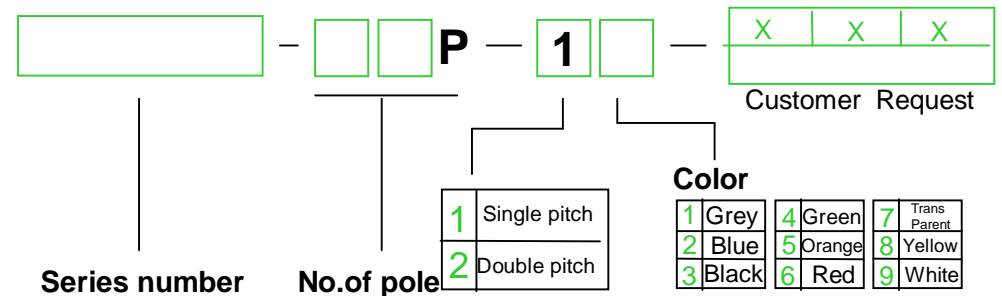

mm (INCH)		DEGSON ELECTRONICS CO., LTD.				
THIROANGLE PROJECTION	NAME	DG1.5T	DG2.5T	DG4T	DG6T	
		DG10T	DG16T	DG25T	DG35T	