
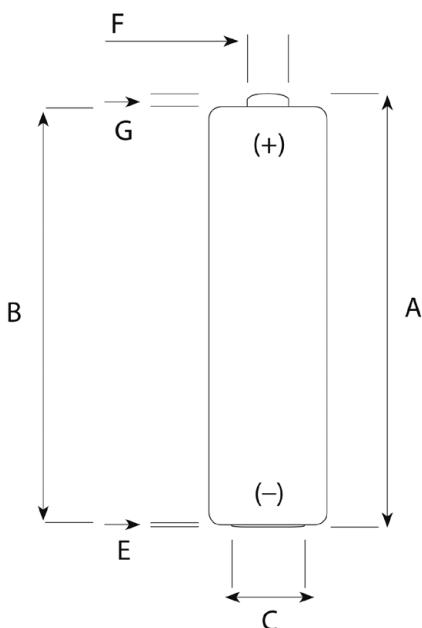


## LR6AD POWERLINE

IEC DIMENSIONS (MM)

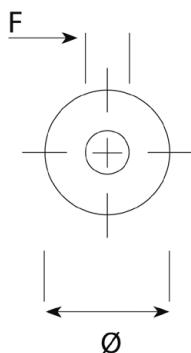

Dimensions	max. (mm)	min. (mm)
A	50.5	
B		49.2
C		7.0
E	0.5	
F	5.5	
G		1.0
Ø	14.5	13.5









## SPECIFICATIONS

Name	LR6 / M / AA / AM3 / MIGNON / MN1500 / 15A / 15AC
Made in	Belgium
Type	Alkaline foil
Nominal voltage	1.5V
Electrolyte	Potassium Hydroxide
Average weight	23.3g
Storage temperature range	+10°C ~ +25°C
Operating temperature range	-20°C ~ +45°C
Average impedance	approx. 105mΩ @ 1kHz AC
Heavy metals	No added mercury (Hg), Cadmium (Cd) or Lead (Pb)
Compliant with	IEC 60086 non dangerous goods regulation Nordic Ecolabel (White Swan) version 3.7 EC directive 91/157EC, 98/101EC, 2006/66/EC
Recommended cut-off voltage	0.8V per cell


The information herein is believed to be correct. However no warranty is made, either expressed or implied, regarding the accuracy of the results to be obtained from the use of such information. Test results are strictly according to IEC conditions. Capacities of batteries depend on drain, temperature and cut-off voltage. Data are subject to change.

## LR6AD POWERLINE

## TYPICAL DISCHARGE VALUES

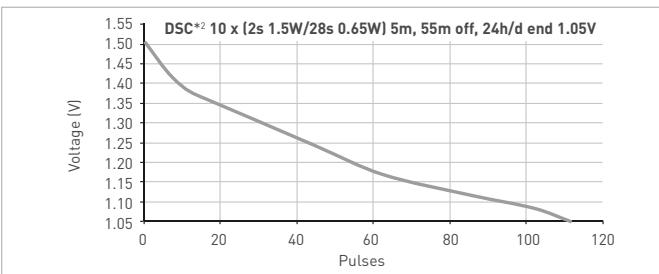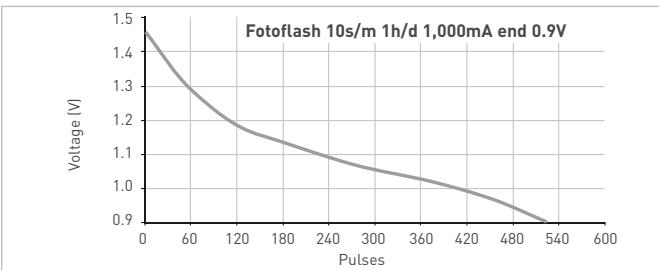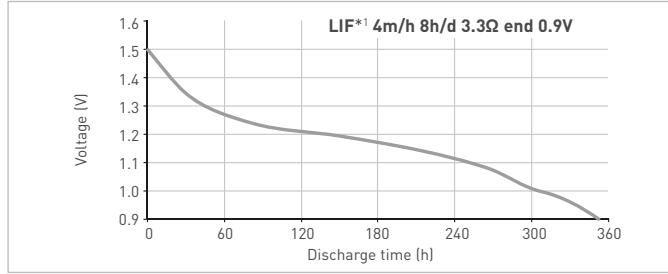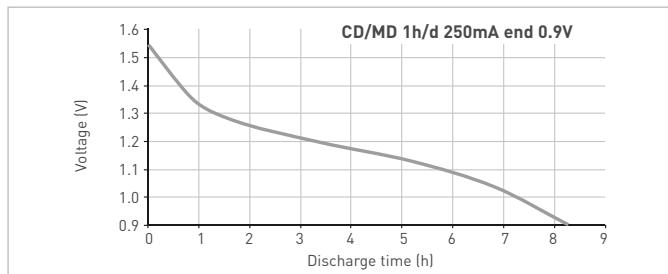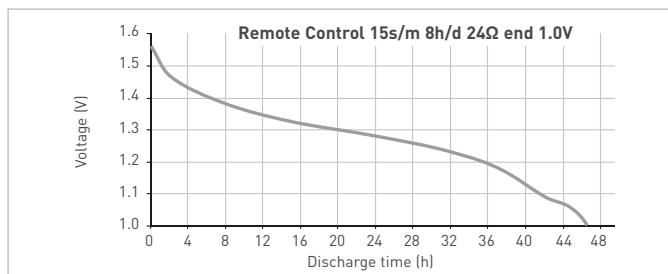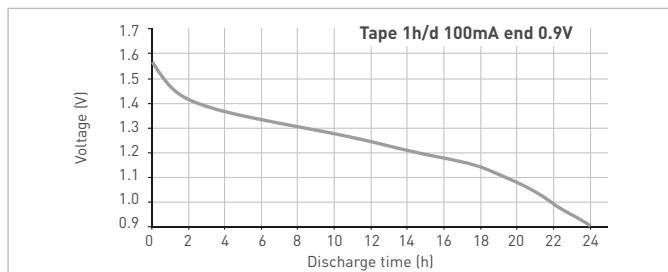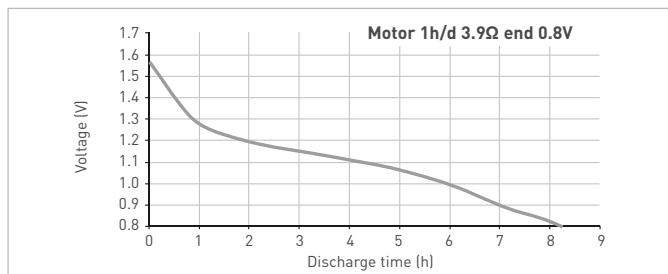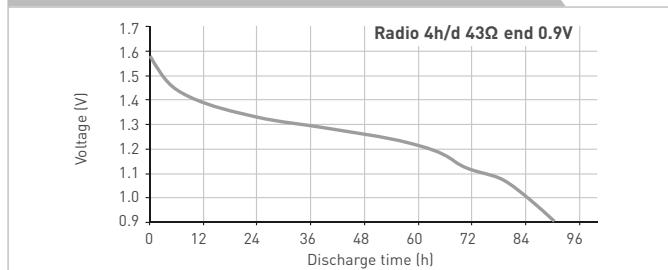

## DISCHARGE TEMPERATURE CHARACTERISTICS

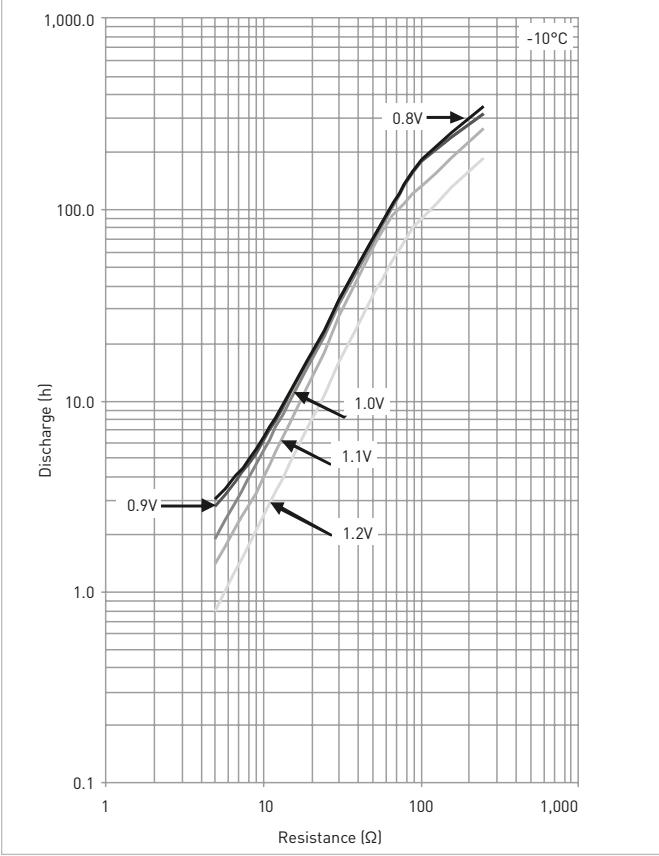\*<sup>1</sup> Digital still camera    \*<sup>2</sup> Light intention flashlight

The information herein is believed to be correct. However no warranty is made, either expressed or implied, regarding the accuracy of the results to be obtained from the use of such information. Test results are strictly according to IEC conditions. Capacities of batteries depend on drain, temperature and cut-off voltage. Data are subject to change.

# 6 INDIVIDUAL DATA SHEETS

## LR6AD POWERLINE

### DISCHARGE TEMPERATURE CHARACTERISTICS

