


|: 210-112

Steel carrier rail; 35 x 7.5 mm; 1 mm thick; 2 m long; slotted; according to EN 60715;
"Hole width 25 mm; silver-colored

<https://www.wago.com/210-112>



:  silver-colored

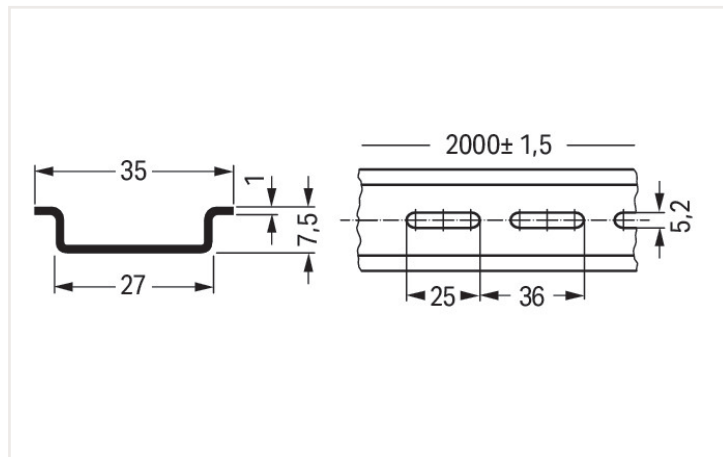

Dimensions in mm

Technical data

Main product function

Mounting accessories

Physical data

Width	2000 mm / 78.74 inches
Height	7.5 mm / 0.295 inches
Depth	35 mm / 1.378 inches

Material data

Color	silver-colored
Fire load	0 MJ
Weight	630 g

Commercial data

Product Group	2 (Terminal Block Accessories)
eCl@ss 10.0	27-40-06-02
eCl@ss 9.0	27-40-06-02
ETIM 8.0	EC001285
ETIM 7.0	EC001285
PU (SPU)	10 (1) Stück
Packaging type	Box
Country of origin VKOrg Germany	IT
GTIN	4017332272292
Customs tariff number VKOrg Germany	72169180000

Downloads

Environmental Product Compliance

Compliance Search

Environmental Product Compliance 210-112



Documentation

Bid Text

Document ID	Date	Format	Size	Action
210-112	19.02.2019	xml	2.73 KB	
210-112	23.11.2018	docx	14.52 KB	

CAD/CAE-Data

CAD data

2D/3D Models 210-112



CAE data

WSCAD Universe 210-112



ZUKEN Portal 210-112



1 Compatible products

1.1 Optional accessories

1.1.1 Installation

1.1.1.1 Mounting accessories



[: 210-148](#)

Angled support bracket; without screw; silver-colored



[: 209-109](#)

Edge guards; for DIN 35 rail (7.5 mm high); gray



[: 209-137](#)

Mounting adapter; can be used as end stop; 6.5 mm wide; gray



[: 210-149](#)

Screw M 5 x 8; for angled support bracket



[: 249-117](#)

Screwless end stop; 10 mm wide; for DIN-rail 35 x 15 and 35 x 7.5; gray



[: 249-197](#)

Screwless end stop; 14 mm wide; for DIN-rail 35 x 15 and 35 x 7.5; gray



[: 249-116](#)

Screwless end stop; 6 mm wide; for DIN-rail 35 x 15 and 35 x 7.5; gray

1.1.2 Marking

1.1.2.1 Label



[: 210-808](#)

Labels; for Smart Printer; 9.5 x 25 mm; white



[: 210-708](#)

Labels; for TP printers; 9.5 x 25 mm; white

Installation notes

DIN-Rail	Item No.	Current [A]	Acc. to mm ² /AWG Cu
DIN 35 x 7.5 (steel)			
slotted	210-112	76	16/6
unslotted	210-113	76	16/6
DIN 35 x 15 (steel)			
1.5 mm thick	210-114	125	35/2
2.3 mm thick	210-118	125	35/2
DIN 35 x 7.5 (Al)			
unslotted	210-196	76	16/6
DIN 35 x 15 (Cu)			
2.3 mm thick	210-198	309	150/6/0
Current applies to rails of 1 m/3'3" length			

When using standard DIN-rails as ground conductor busbars, please refer to the maximum current capacities listed above. Steel DIN-rails are not suited for PEN (ground and N-conductor) applications per EN 60947-7-2 (VDE 0611, Part 3).