

Specifications:

Current Rating: 3.0A AC/DC
 Voltage Rating: 250V AC/DC
 Contact Resistance: 20m ohm. max.
 Insulation Resistance: 1000M ohm. Min.
 Withstanding Voltage: 600V AC For One Minute
 Operating Temperature Range: -40°C to +105°C

Material and Finish:
 Insulator: High Temp. Plastic(Nylon 9T UL94V-0)
 Insulator Color:Black
 Contact: Phosphor Bronze
 Plating: Gold Plated


How To Order

2214SM-XXG-75

Total Height 7.5mm
 G:Gold Plated
 No. Of Contacts
 SM: SMD Type

Dimension :

Poles	DIM:(mm)		Poles	DIM:(mm)	
	A	B		A	B
4	5.58	2.54	24	30.98	27.94
6	8.12	5.08	26	33.52	30.48
8	10.66	7.62	28	36.06	33.02
10	13.20	10.16	30	38.60	35.56
12	15.74	12.70	32	41.14	38.10
14	18.28	15.24	34	43.68	40.64
16	20.82	17.78	36	46.22	43.18
18	23.36	20.32	38	48.76	45.72
20	25.90	22.86	40	51.30	48.26
22	28.44	25.40			

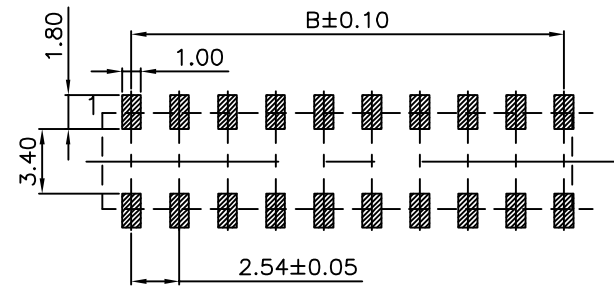

P.C.B. Layout

RoHS Compliant

F			
E			
D			
C			
B			
A	07-05-2013	(P0001)	Cherry Wu
REV	DATE	FILE	BY

DRAWN:
Cherry Wu

CHECKED:
Dennis Lin

APPROVAL:
Mike Wu

GENERAL TOLERANCE:
.X=±0.2
.XX=±0.15

UNIT: MM

SCALE:

SHEET: 1 / 1

PROJECTION:

Neltron Industrial Co., Ltd.

DESCRIPTION:
2.54mm PCB Socket 7.5mm Height SMD Type

PART NO:
2214SM-XXG-75

SIZE
A4