



Fieldbus Connector PROFIBUS; with D-sub male connector; 9-pole

Item No.: 750-960



Fieldbus Connector PROFIBUS; with D-sub male connector; 9-pole

Marking

RoHS ✓
Compliant

Business data

Supplier	WAGO
Item no.	750-960
GTIN / EAN	4045454320157
Content	1
Order amount	1
Customer item number	

Notes

Item description: The fieldbus connector links a PROFIBUS device to a PROFIBUS line. The fieldbus connector has the following features: 2 horizontal cable entries. One input and one output. Fast and maintenance-free CAGE CLAMP® connection, can be held in the open position with the help of an actuation slide mechanism. Externally operable switch to activate and/or deactivate the network terminating resistor. For the first and last station on the bus, the switch must be set to "ON" (terminating resistor activated). Switch setting to "OFF" for the intermediate stations on the bus (terminating resistor deactivated).



Technical data

Miscellaneous

Color	light gray
Power supply	4.75 V ... 5.25 V DC

Technical data	
<i>Max. current consumption (internal) [mA]</i>	<i>5 [mA]</i>
<i>Double cable input</i>	<i>min. Ø 4.5 mm/0.177 in / max. Ø 9.5 mm/0.374 in</i>
<i>Data transmission rate</i>	<i>corresponding to PROFIBUS specification up to 12 Mbits/s</i>
<i>Degree of protection</i>	<i>IP20</i>
<i>Connection technology</i>	<i>CAGE CLAMP®</i>
<i>Strip length</i>	<i>5 ... 6 mm / 0.2 ... 0.24 Inch</i>
<i>Fire load [MJ]</i>	<i>0.623 [MJ]</i>
<i>Weight [g]</i>	<i>31.055 [g]</i>
<i>Width</i>	<i>54 mm / 2.126 Inch</i>
<i>Height</i>	<i>16 mm / 0.63 Inch</i>
<i>Depth</i>	<i>45 mm / 1.772 Inch</i>
<i>Fixing screw</i>	<i>UNC- 2 A 4-40</i>
<i>Max. tightening torque [Nm]</i>	<i>0.4 [Nm]</i>
<i>Housing material</i>	<i>PA66-105-V2</i>
<i>Housing color</i>	<i>light gray</i>
<i>Storage temperature</i>	<i>-25 °C ... +85 °C</i>
<i>Relative air humidity (no condensation) [%]</i>	<i>95 [%]</i>
<i>Ambient operating temperature</i>	<i>0 °C ... +60 °C</i>

Images & drawings

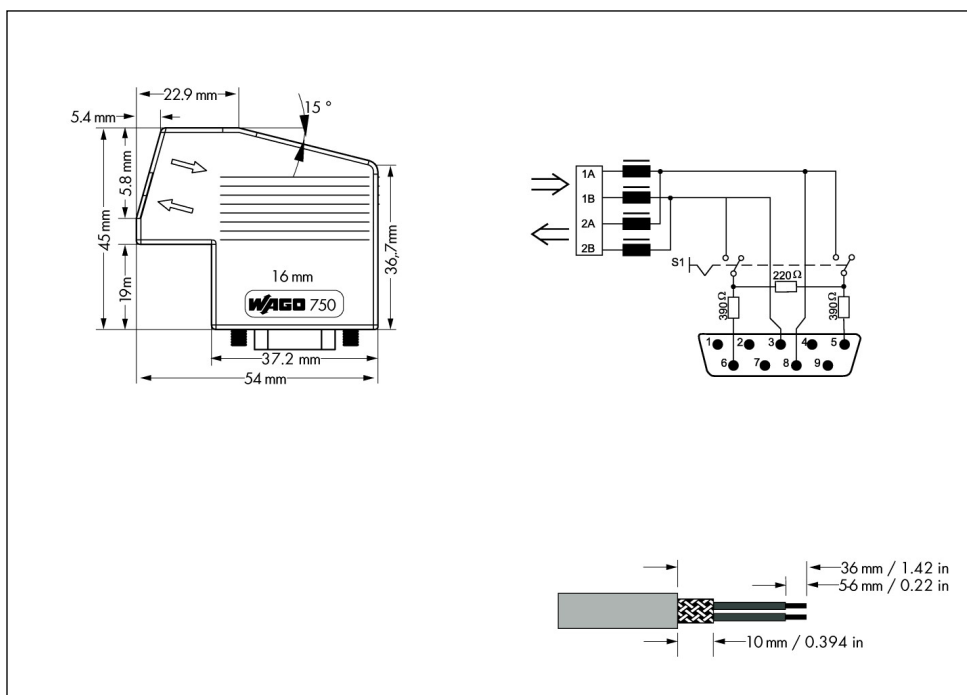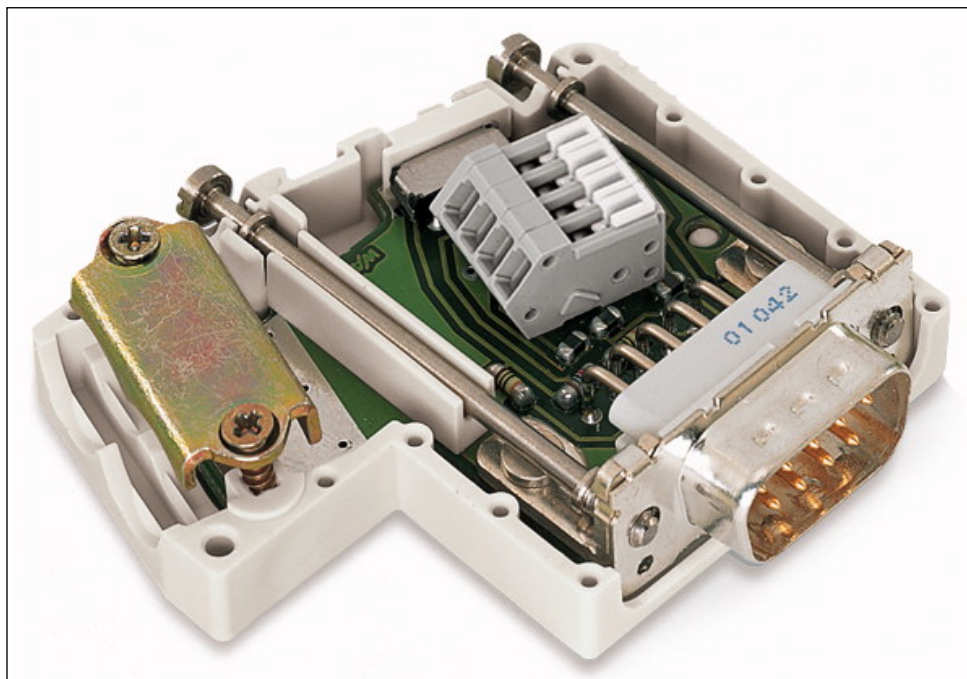

Address

WAGO Kontakttechnik GmbH & Co. KG

Hansastr. 27

32423 Minden

Telefon: 0571/887-0

Fax: 0571/887-169

<http://www.wago.com>

© WAGO Kontakttechnik GmbH & Co. KG

Technische Änderungen und Irrtümer vorbehalten.