
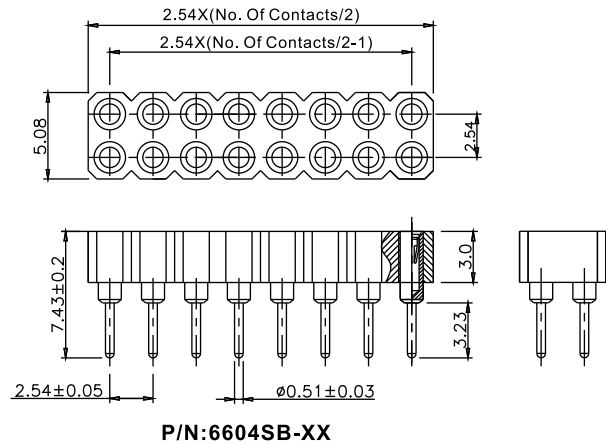
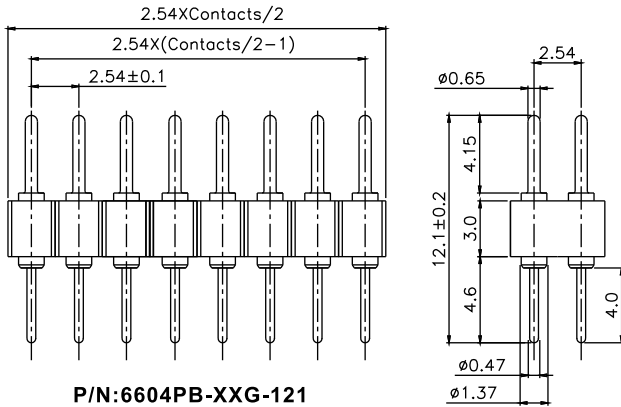
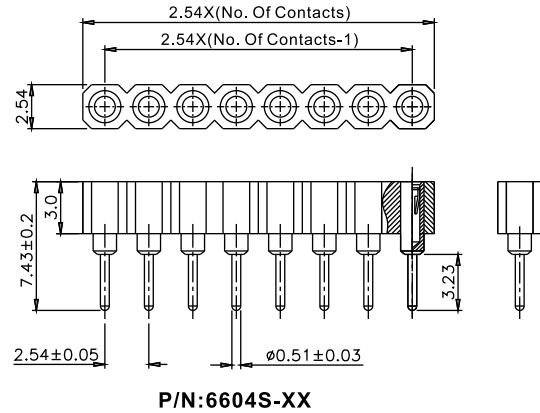


■ **Specifications**

Current rating:3.0AAC/DC
Voltage rating:100V AC/DC
Contact resistance:10m ohm. max.
Insulation resistance:5000M ohm. Min.
Withstanding voltage:1000V AC for one minute
Operating temperature range:-40°C to +105°C

■ **Material and Finish**

Insulator:High Temp. Plastic(UL94V-0)
Contact:Copper Alloy
Finish:Gold/Tin Plated(Plug)
Selective Gold Plated(Socket)

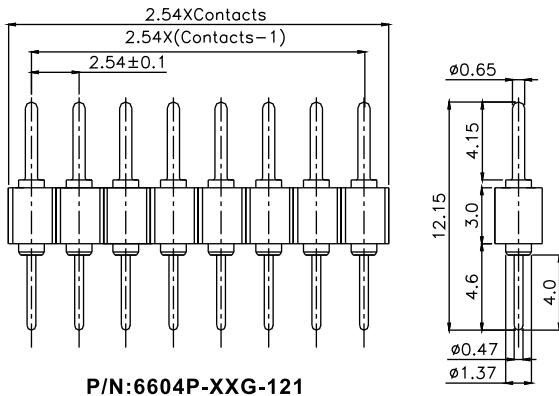

Machine Pin

■ **Ordering Information**

6604P-XXX-121

① ② ③ ④

① P:Single Row PB:Double Rows	② No. Of Contacts ③ G:Gold Plated T: Tin Plated	④ Total Length 12.1mm
----------------------------------	---	--------------------------

6604S-XX

① ②

① 6604S:Single Row 6604SB:Double Rows	② No. Of Contacts
--	-------------------

Unit:mm