

Printview: Male connector; with angled solder pins; 2-pole; Pin spacing 5 mm / 0.197 in; 100% protected against mismatching; without preceding ground contact; with closed end; Horizontal PCB mounting - Item No.: 721-432/001-000



Male connector; with angled solder pins; 2-pole; Pin spacing 5 mm / 0.197 in; 100% protected against mismatching; without preceding ground contact; with closed end; Horizontal PCB mounting

Item No.: 721-432/001-000



Male connector; with angled solder pins; 2-pole; Pin spacing 5 mm / 0.197 in; 100% protected against mismatching; without preceding ground contact; with closed end; Horizontal PCB mounting

Marking

RoHS ✓
Compliant

Business data

Supplier	WAGO
Item no.	721-432/001-000
GTIN / EAN	4044918869492
Content	1
Order amount	200
Customer item number	

Notes

Item description: Version with press-in pins provides solder-free connection to PCB 100% protected against mismatching
Coding option available

Technical data

Miscellaneous


No. of poles	2
Pin spacing	5 mm (0.197 in)

Printview: Male connector; with angled solder pins; 2-pole; Pin spacing 5 mm / 0.197 in; 100% protected against mismatching; without preceding ground contact; with closed end; Horizontal PCB mounting - Item No.: 721-432/001-000


Technical data	
<i>Color</i>	<i>light gray</i>
<i>Ratings per</i>	<i>IEC/EN 60664-1</i>
<i>Rated voltage (III / 3) [V]</i>	<i>320 [V]</i>
<i>Rated impulse voltage (III / 3) [kV]</i>	<i>4 [kV]</i>
<i>Rated voltage (III/2) [V]</i>	<i>320 [V]</i>
<i>Rated impulse voltage (III / 2) [kV]</i>	<i>4 [kV]</i>
<i>Rated voltage (II / 2) [V]</i>	<i>630 [V]</i>
<i>Rated impulse voltage (II / 2) [kV]</i>	<i>4 [kV]</i>
<i>Rated current [A]</i>	<i>12 [A]</i>
<i>Number of levels</i>	<i>1</i>
<i>Solder pin length [mm]</i>	<i>3.8 [mm]</i>
<i>Drilled hole diameter (tolerance) [mm]</i>	<i>1.4(+ 0.1) [mm]</i>
<i>Drilled hole diameter [mm] [mm]</i>	<i>1.4 [mm]</i>
<i>Tolerance of drilled hole diameter plus [mm] [mm]</i>	<i>+0.1 [mm]</i>
<i>Material group</i>	<i>I</i>
<i>Insulating material</i>	<i>Polyamide 66 (PA 66)</i>
<i>Flammability class per UL94</i>	<i>V0</i>
<i>Limit temperature range</i>	<i>-60 ... 100 C</i>
<i>Contact material</i>	<i>Electrolytic copper (Ecu)</i>
<i>Contact plating</i>	<i>tin-plated</i>
<i>Fire load [MJ]</i>	<i>0.018 [MJ]</i>
<i>Weight [g]</i>	<i>0.88 [g]</i>
<i>Width</i>	<i>13.2 mm / 0.52 in.</i>
<i>Height</i>	<i>15.2 mm / 0.598 in.</i>
<i>Height from the surface</i>	<i>11.4 mm / 0.449 in.</i>
<i>Depth</i>	<i>12 mm / 0.472 in.</i>

Printview: Male connector; with angled solder pins; 2-pole; Pin spacing 5 mm / 0.197 in; 100% protected against mismatching; without preceding ground contact; with closed end; Horizontal PCB mounting - Item No.: 721-432/001-000

Images & drawings

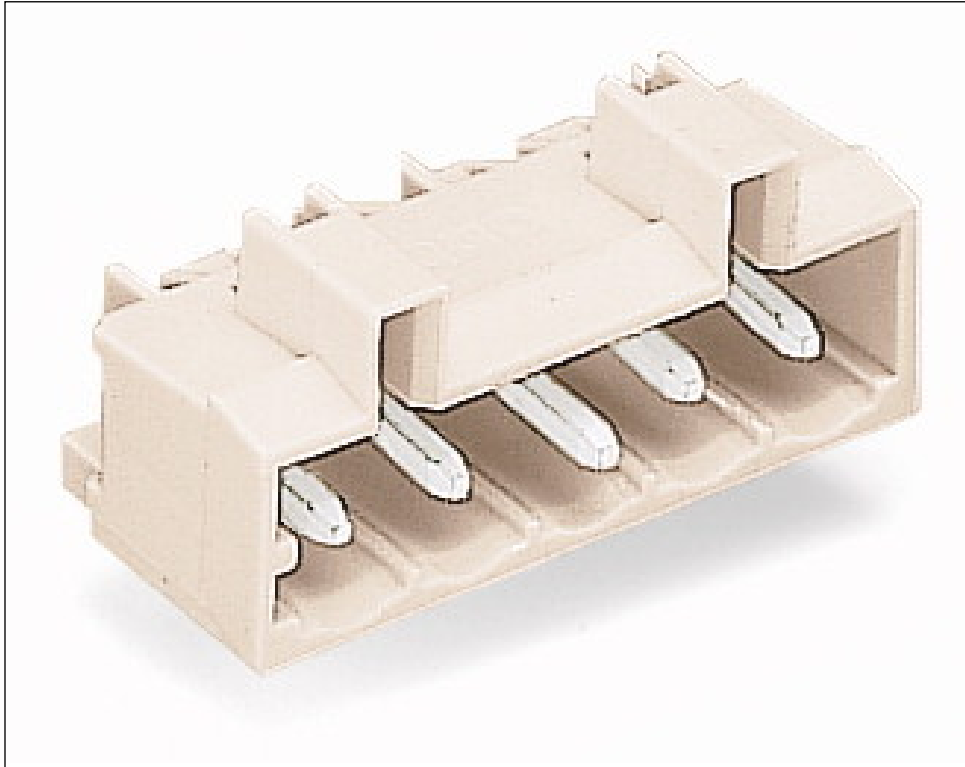

Printview: Male connector; with angled solder pins; 2-pole; Pin spacing 5 mm / 0.197 in; 100% protected against mismatching; without preceding ground contact; with closed end; Horizontal PCB mounting - Item No.: 721-432/001-000

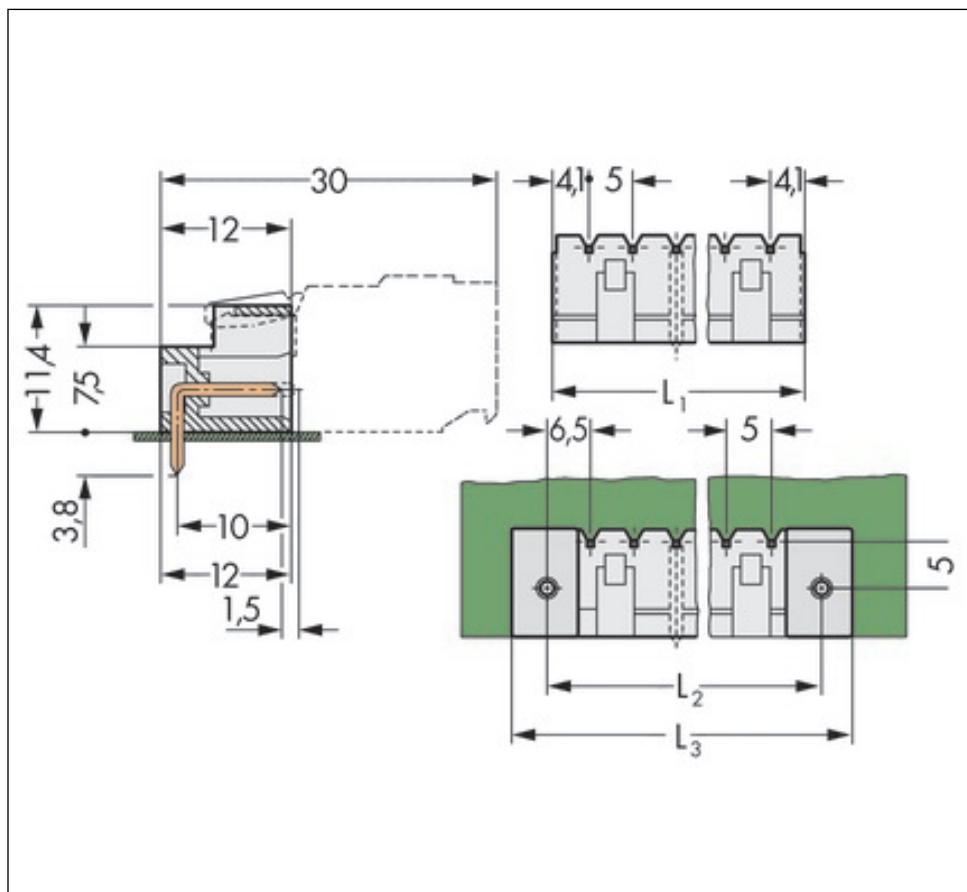

Address

WAGO Kontakttechnik GmbH & Co. KG

Hansastr. 27

32423 Minden

Telefon: 0571/887-0

Fax: 0571/887-169

<http://www.wago.com>

© WAGO Kontakttechnik GmbH & Co. KG

Technische Änderungen und Irrtümer vorbehalten.