




Pin Header 2.54mm 1 & 2 & 3 Row H=1.5/1.7/2.5mm Stack Straight Type

Specifications





Current Rate: 3 AMP
 Insulation Resistance: 1000MΩ Min.
 Contact Resistance: 20mΩ Max.
 Dielectric Voltage: 1000V AC for one minute
 Operation Temperature: -40°C to +105°C

Material





Insulator: P.B.T or Hi-Temp. Thermoplastic, UL 94V-0
 Terminal: Copper Alloy
 Standard Plating: Gold Flash

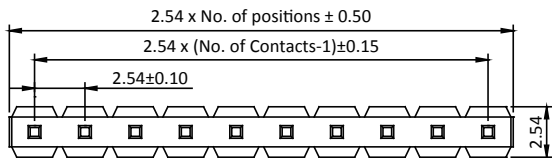



P/N.: 5PH1DDA15/17/25-1XX

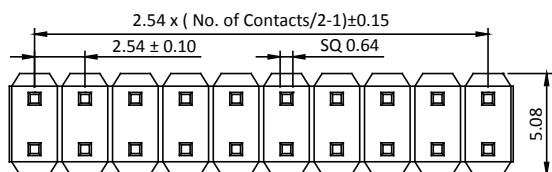

P/N.: 5PH1DDA15/17/25-2XX

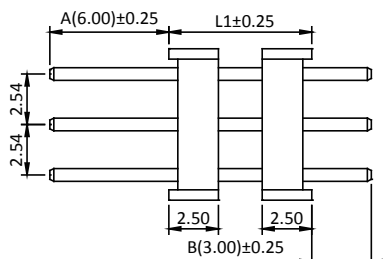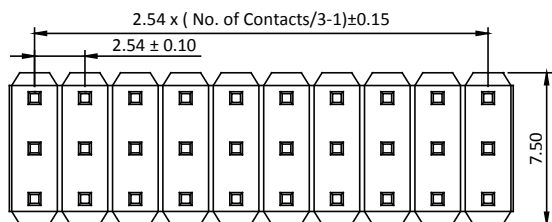

P/N.: 5PH1DDA15/17/25-3XX

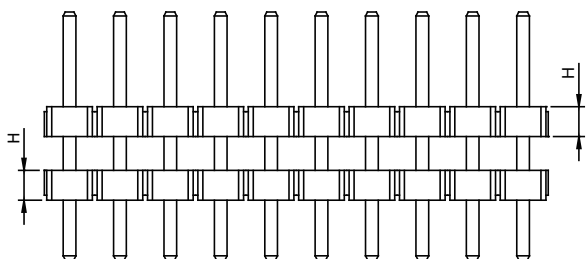

Recommended PCB Layout
 (PCB TOLERANCE ±0.05)

ORDER INFORMATION

5 P H 1 D D A X X - X X X X N N B X - A/L1/B

DD : Dual Plastic DIP

Plastic Height
 15: H=1.5mm
 17: H=1.7mm
 25: H=2.5mm

No. of Contact
 H: 1.5mm/1.7mm
 Per Row (02~40)
 H: 2.5mm
 Per Row (02~50)

1: Single Row
 2: Dual Row
 3: Triple Row

⊙G0: Gold Flash
 GA: Gold 5u"
 GB: Gold 10u"
 GC: Gold 20u"
 GD: Gold 30u"
 T0: Tin Plated
 TE: Tin 200u"

S0: Selective
 SA: Selective 5u"
 SB: Selective 10u"
 SC: Selective 20u"
 SD: Selective 30u"

N: W/O Peg

B: Bag

U: RoHS Hi-Temp.
 L: RoHS + PBT

EX.: 060070030
 A: 6.00(060)
 L1: 7.00(070)
 B: 3.00(030)

⊙: Standard Recommend
 Tube package is not available for under 1*5 & 2*5 pin counts

Old P/N: PH1D15/17/25-1/2/3