



**Female connector; 3-pole; Pin spacing 5 mm / 0.197 in; 100% protected against mismatching; codable**

Item No.: 721-103/026-000



---

Female connector; 3-pole; Pin spacing 5 mm / 0.197 in; 100% protected against mismatching; codable

### Marking

RoHS ✓  
Compliant

### Business data

Supplier	WAGO
Item no.	721-103/026-000
GTIN / EAN	4044918353229
Content	1
Order amount	100
Customer item number	

### Notes

*Item description: Universal connection for all conductor types Easy cable pre-assembly and on-unit wiring via vertical and horizontal CAGE CLAMP® actuation Integrated test ports 100% protected against mismatching Coding option available*

### Technical data

#### Miscellaneous

No. of poles	3
Pin spacing	5 mm (0.197 in)
Total number of connection points	3

<b>Technical data</b>	
Total number of potentials	3
Color	light gray
Ratings per	IEC/EN 60664-1
Rated voltage (III / 3) [V]	320 [V]
Rated impulse voltage (III / 3) [kV]	4 [kV]
Rated voltage (III/2) [V]	320 [V]
Rated impulse voltage (III / 2) [kV]	4 [kV]
Rated voltage (II / 2) [V]	630 [V]
Rated impulse voltage (II / 2) [kV]	4 [kV]
Rated current [A]	16 [A]
Number of connection objects	1
Number of levels	1
Connection technology	CAGE CLAMP®
Number of connection points connector	1
Actuation type	Operating tool
Solid conductors, tool-operated termination	0.08 ... 2.5 mm <sup>2</sup> / 28 ... 12 AWG
Fine-stranded conductors, tool-operated termination	0.08 ... 2.5 mm <sup>2</sup> / 28 ... 12 AWG
Fine-stranded conductors with insulated ferrule	0.25 ... 1.5 mm <sup>2</sup> / ...
Fine-stranded conductors with uninsulated ferrule	0.25 ... 2.5 mm <sup>2</sup> / ...
Strip length	8 ... 9 mm / 0.31 ... 0.35 inch
Cross section from (1) [AWG]	28 [AWG]
Cross section from (2) [mm <sup>2</sup> ]	0.08 [mm <sup>2</sup> ]
Cross section up to (2) [mm <sup>2</sup> ]	2.5 [mm <sup>2</sup> ]
Material group	I
Insulating material	Polyamide 66 (PA 66)
Flammability class per UL94	V0
Limit temperature range	-60 ... 85 C
Clamping spring material	Chrome-nickel spring steel (CrNi)
Contact material	Copper alloy
Contact plating	tin-plated
Fire load [MJ]	0.082 [MJ]
Weight [g]	5.71 [g]
Width	16.5 mm / 0.65 in.
Height	14.3 mm / 0.563 in.


Printview: Female connector; 3-pole; Pin spacing 5 mm / 0.197 in; 100% protected against mismatching;  
codable - Item No.: 721-103/026-000


---

**Technical data**

<i>Depth</i>	<i>26.45 mm / 1.041 in.</i>
--------------	-----------------------------

Images & drawings

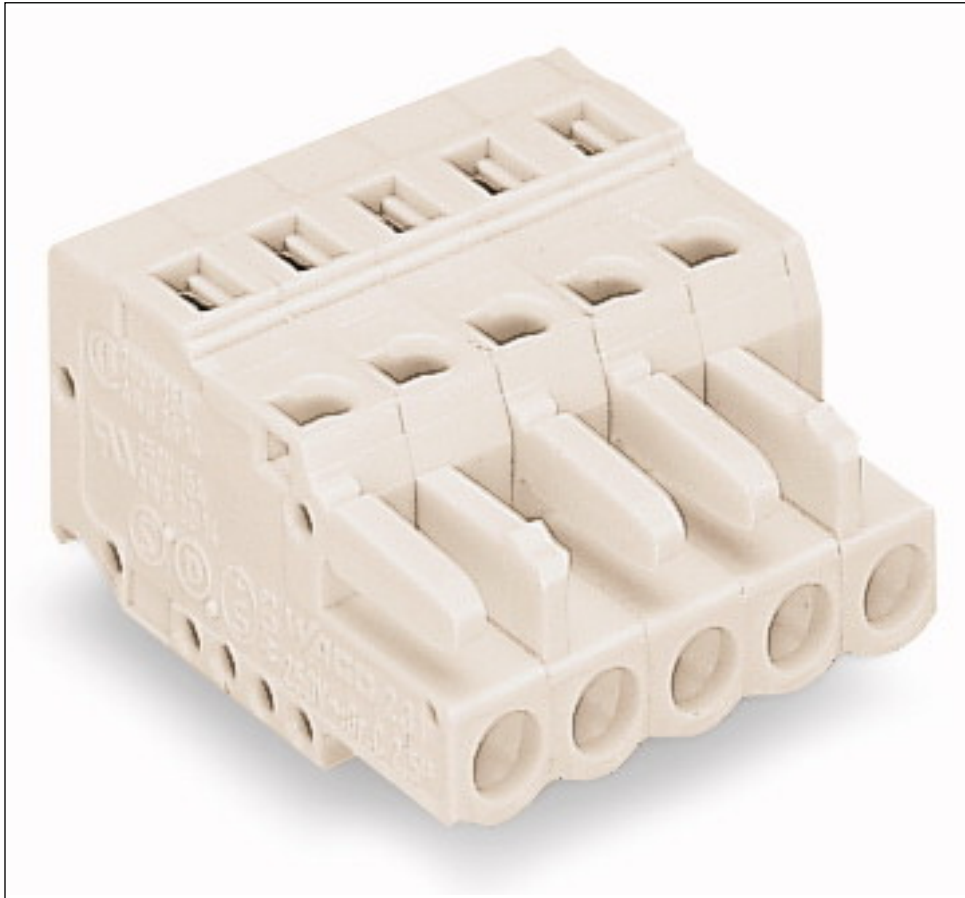

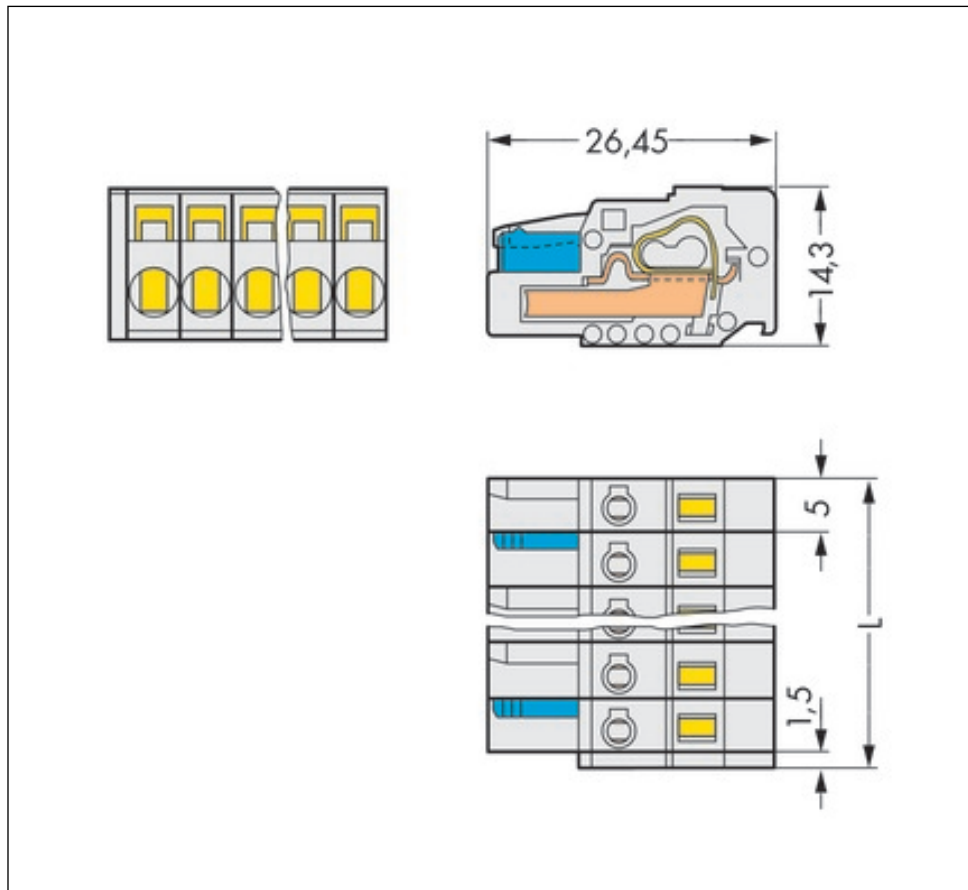

#### Address

WAGO Kontakttechnik GmbH & Co. KG

Hansastr. 27

32423 Minden

Telefon: 0571/887-0

Fax: 0571/887-169

<http://www.wago.com>

© WAGO Kontakttechnik GmbH & Co. KG

Technische Änderungen und Irrtümer vorbehalten.