


Specifications:
 Current rating: 3.0A AC/DC
 Voltage rating: 250V AC/DC
 Contact resistance: 20m ohm. max.
 Insulation resistance: 1000M ohm. Min.
 Withstanding voltage: 600V AC for one minute
 Operating temperature range: -40°C to + 105°C
 Material and Finish:
 Insulator: High Temp. Plastic (Nylon 9T UL94V-0)
 Standard Color:Black
 Contact: Phosphor Bronze
 Plating:Gold Plated
 How To Order
 2212S-XXX-72

Plastic Height 7.2mm
 T: Tin Plated
 G: Gold Plated
 No. Of Positions
 Straight Type

Dimension :

Poles	DIM:(mm)		Poles	DIM:(mm)		Poles	DIM:(mm)		Poles	DIM:(mm)	
	A	B		A	B		A	B		A	B
2	5.58	2.54	12	30.98	27.94	22	56.38	53.34	32	81.78	78.74
3	8.12	5.08	13	33.52	30.48	23	58.92	55.88	33	84.32	81.28
4	10.66	7.62	14	36.06	33.02	24	61.46	58.42	34	86.86	83.82
5	13.20	10.16	15	38.60	35.56	25	64.00	60.96	35	89.40	86.36
6	15.74	12.70	16	41.14	38.10	26	66.54	63.50	36	91.94	88.90
7	18.28	15.24	17	43.68	40.64	27	69.08	66.04	37	94.48	91.44
8	20.82	17.78	18	46.22	43.18	28	71.62	68.58	38	97.02	93.98
9	23.36	20.32	19	48.76	45.72	29	74.16	71.12	39	99.56	96.52
10	25.90	22.86	20	51.30	48.26	30	76.70	73.66	40	102.1	99.06
11	28.44	25.40	21	53.84	50.80	31	79.24	76.20			

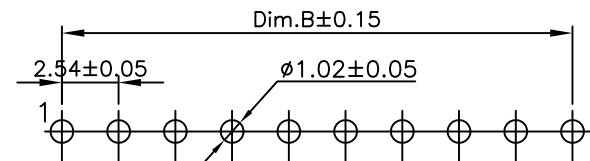

P.C.B. Layout

RoHS Compliant

E				DRAWN: Justin Ho	GENERAL TOLERANCE: .X=±0.2 .XX=±0.15	Neltron Industrial Co., Ltd.	
D				CHECKED: Jerry Chen	UNIT: MM		DESCRIPTION: 2.54mm PCB Socket Single Row 7.2mm Height
C					SCALE:	PART NO: 2212S-XXX-72	A4
B				APPROVAL: Mike Wu	SHEET: 1 / 1		
A	04-Jan-2016	(P0001)	Justin Ho		PROJECTION:		
REV	DATE	FILE	BY				