

Printview: 2-conductor terminal block; with snap-in mounting foot; for plate thickness 0.6 - 1.2 mm; Fixing hole 3.5 mm Ø; also fits 210-154 aluminum rail or with 209-123 mounting carrier for DIN 35 rail - Item No.: 260-311



2-conductor terminal block; with snap-in mounting foot; for plate thickness 0.6 - 1.2 mm; Fixing hole 3.5 mm Ø; also fits 210-154 aluminum rail or with 209-123 mounting carrier for DIN 35 rail

Item No.: 260-311



2-conductor terminal block; with snap-in mounting foot; for plate thickness 0.6 - 1.2 mm; Fixing hole 3.5 mm Ø; also fits 210-154 aluminum rail or with 209-123 mounting carrier for DIN 35 rail

Marking

RoHS ✓
Compliant

Business data

Supplier	WAGO
Item no.	260-311
GTIN / EAN	4044918593519
Content	1
Order amount	50
Customer item number	

Notes

Technical data

Miscellaneous


Total number of connection points	2
Total number of potentials	1
Color	gray
Rated voltage (III / 3) [V]	400 [V]

Printview: 2-conductor terminal block; with snap-in mounting foot; for plate thickness 0.6 - 1.2 mm; Fixing hole 3.5 mm Ø; also fits 210-154 aluminum rail or with 209-123 mounting carrier for DIN 35 rail - Item No.: 260-311

Technical data	
<i>Rated impulse voltage (III / 3) [kV]</i>	<i>6 [kV]</i>
<i>Rated current [A]</i>	<i>18 [A]</i>
<i>Number of levels</i>	<i>1</i>
<i>Connection technology</i>	<i>CAGE CLAMP®</i>
<i>Number of connection points connector</i>	<i>2</i>
<i>Actuation type</i>	<i>Operating tool</i>
<i>Connectable conductor materials</i>	<i>Copper</i>
<i>Solid conductors, tool-operated termination</i>	<i>0.08 ... 1.5 mm² / 28 ... 16 AWG</i>
<i>Fine-stranded conductors, tool-operated termination</i>	<i>0.08 ... 1.5 mm² / 28 ... 16 AWG</i>
<i>Strip length</i>	<i>8 ... 9 mm / 0.31 ... 0.35 inch</i>
<i>Type of wiring</i>	<i>Side-entry wiring</i>
<i>Design</i>	<i>horizontal</i>
<i>Marking level</i>	<i>Side marking</i>
<i>Fire load [MJ]</i>	<i>0.031 [MJ]</i>
<i>Weight [g]</i>	<i>1.607 [g]</i>
<i>Width</i>	<i>5 mm / 0.197 in.</i>
<i>Height from the surface</i>	<i>17 mm / 0.669 in.</i>
<i>Depth</i>	<i>25 mm / 0.984 in.</i>

Printview: 2-conductor terminal block; with snap-in mounting foot; for plate thickness 0.6 - 1.2 mm; Fixing hole 3.5 mm Ø; also fits 210-154 aluminum rail or with 209-123 mounting carrier for DIN 35 rail - Item No.: 260-311

Images & drawings

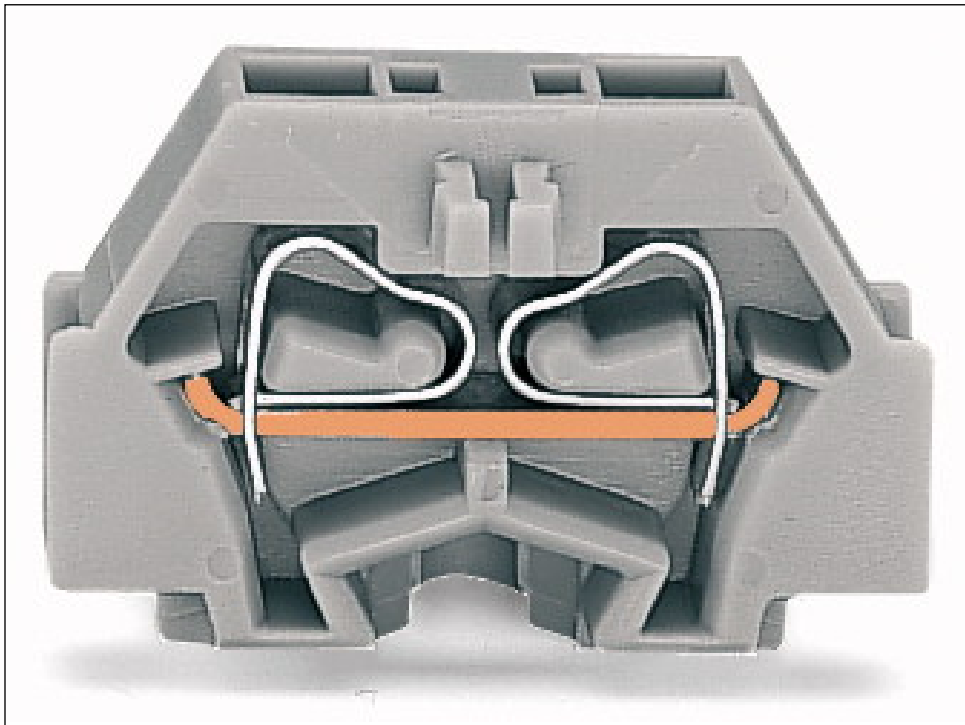

Address

WAGO Kontakttechnik GmbH & Co. KG

Hansastr. 27

32423 Minden

Telefon: 0571/887-0

Fax: 0571/887-169

<http://www.wago.com>

© WAGO Kontakttechnik GmbH & Co. KG

Technische Änderungen und Irrtümer vorbehalten.