

Printview: Angled female connector; 11-pole; Pin spacing 5.08 mm / 0.2 in; codable; with 2 locking latches; Conductor exit same direction as latches - Item No.: 232-411/026-000



Angled female connector; 11-pole; Pin spacing 5.08 mm / 0.2 in; codable; with 2 locking latches; Conductor exit same direction as latches

Item No.: 232-411/026-000



Angled female connector; 11-pole; Pin spacing 5.08 mm / 0.2 in; codable; with 2 locking latches; Conductor exit same direction as latches

Marking

RoHS ✓
Compliant

Business data

Supplier	WAGO
Item no.	232-411/026-000
GTIN / EAN	4044918390002
Content	1
Order amount	25
Customer item number	

Notes

Item description: Universal connection for all conductor types Easy cable pre-assembly and on-unit wiring via vertical and horizontal CAGE CLAMP® actuation Integrated test ports Coding option available

Technical data

Miscellaneous

No. of poles	11
Pin spacing	5.08 mm (0.2 in)
Total number of connection points	11

Printview: Angled female connector; 11-pole; Pin spacing 5.08 mm / 0.2 in; codable; with 2 locking latches;
 Conductor exit same direction as latches - Item No.: 232-411/026-000

Technical data	
Total number of potentials	11
Color	orange
Ratings per	IEC/EN 60664-1
Rated voltage (III / 3) [V]	320 [V]
Rated impulse voltage (III / 3) [kV]	4 [kV]
Rated voltage (III/2) [V]	320 [V]
Rated impulse voltage (III / 2) [kV]	4 [kV]
Rated voltage (II / 2) [V]	630 [V]
Rated impulse voltage (II / 2) [kV]	4 [kV]
Rated current [A]	14 [A]
Number of connection objects	1
Number of levels	1
Connection technology	CAGE CLAMP®
Number of connection points connector	1
Actuation type	Operating tool
Solid conductors, tool-operated termination	0.08 ... 0.2 mm ² / 28 ... 12 AWG
Fine-stranded conductors, tool-operated termination	0.08 ... 2.5 mm ² / 28 ... 12 AWG
Fine-stranded conductors with insulated ferrule	0.25 ... 1.5 mm ² / ...
Fine-stranded conductors with uninsulated ferrule	0.25 ... 2.5 mm ² / ...
Strip length	8 ... 9 mm / 0.31 ... 0.35 inch
Cross section from (1) [AWG]	28 [AWG]
Cross section from (2) [mm ²]	0.08 [mm ²]
Cross section up to (2) [mm ²]	2.5 [mm ²]
Material group	I
Insulating material	Polyamide 66 (PA 66)
Flammability class per UL94	V0
Limit temperature range	-60 ... 85 C
Clamping spring material	Chrome-nickel spring steel (CrNi)
Contact material	Copper alloy
Contact plating	tin-plated
Fire load [MJ]	0.337 [MJ]
Weight [g]	20.645 [g]
Width	58.28 mm / 2.294 in.
Height	19.9 mm / 0.783 in.


Printview: Angled female connector; 11-pole; Pin spacing 5.08 mm / 0.2 in; codable; with 2 locking latches;
Conductor exit same direction as latches - Item No.: 232-411/026-000

Technical data


<i>Depth</i>	<i>22.75 mm / 0.896 in.</i>
--------------	-----------------------------

Printview: Angled female connector; 11-pole; Pin spacing 5.08 mm / 0.2 in; codable; with 2 locking latches; Conductor exit same direction as latches - Item No.: 232-411/026-000

Images & drawings

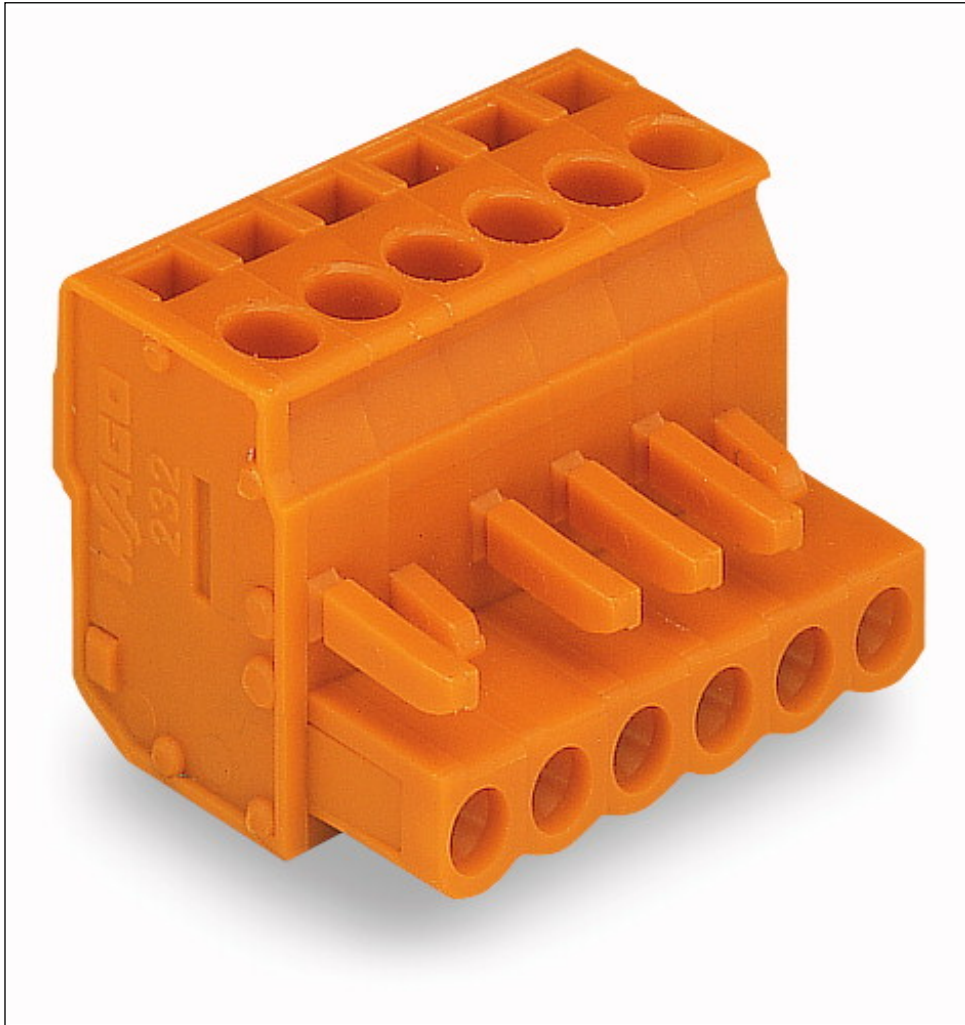

Printview: Angled female connector; 11-pole; Pin spacing 5.08 mm / 0.2 in; codable; with 2 locking latches;
Conductor exit same direction as latches - Item No.: 232-411/026-000

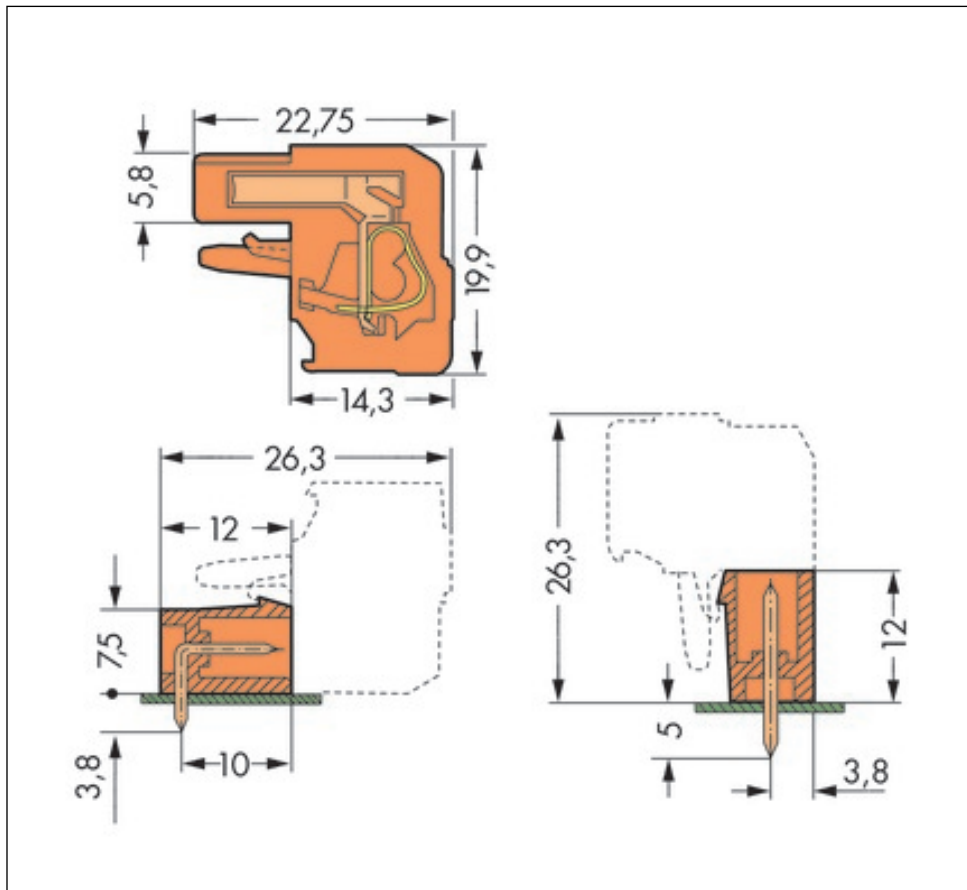

Address

WAGO Kontakttechnik GmbH & Co. KG

Hansastr. 27

32423 Minden

Telefon: 0571/887-0

Fax: 0571/887-169

<http://www.wago.com>

© WAGO Kontakttechnik GmbH & Co. KG

Technische Änderungen und Irrtümer vorbehalten.