


Crimphousing 2,54 mm

Series

431



Rated current	3,0 A
Rated voltage	250 VRMS / VDC Please consider air- and creepage distances
Withstand voltage	1000 VRMS for 1 minute
Material contacts	Copper alloy
Material insulator	Thermoplast UL94V-0
Operating temperature	-25°C to +105°C

pitch
2,54


mating pin
size

□ **0,64**

max.
pincount
020

All dimensions in mm.

Variation

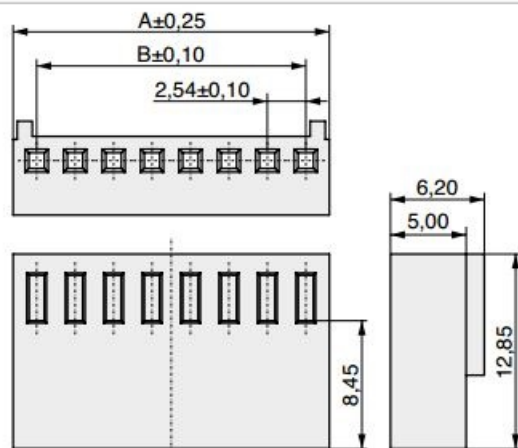

1