














Flat Ribbon Cable Series

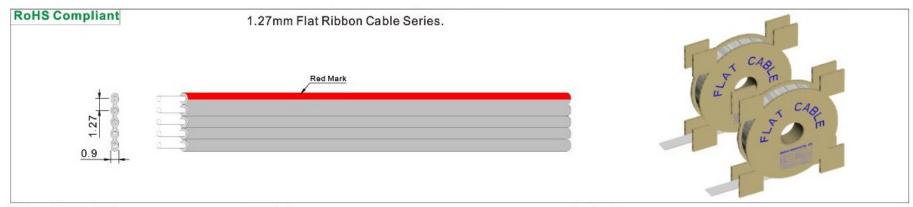

830-127-XXC-250

250 Feet/R

No. Of Contacts

1.27mm Pitch Type

Product Code

Rated Temp. 105°C. Rated Voltage: 300 Volts.
Stranded, Tinned or Bare Copper Conductor
Standard: These Wires are Approved By Both UL and CSA.
Flexible Heat Resistant Lead Free PVC Insulation.
Passes UL VW-1 CSA FT1 FT2 Vertical Flame Test.
Size: 28~24AWG, UL NO.E315658, CSA NO. 244239.

Description:

Application:
For Internal Wiring of Computers, Electronic Equipment,
Communication Devices and Business Machines
4411/4401/4403/4404/4406/4407/4409 Series
IDC Type Product.