


Universal keypads, 1.2 mm key stroke




Manufacturer	ACCORD
Keypad type	universal
Operating temperature	-20...60°C
Mechanical durability	1·10 ⁶ cycles
Operating current max.	20 mA
Max operating voltage	24 V DC
Max. contact resistance:	200 mΩ
Key stroke	1.2 mm
Height	64 mm

Symbol	Keypad type	Keypad colour	Number of keys	Material
KB304-PNW	numeric	white	12	plastic
KB304-PNB	numeric	black	12	plastic
KB304-PAW	alphanumeric	white	12	plastic
KB304-PAB	alphanumeric	black	12	plastic
KB304-MNS-WP	numeric	silver	12	metal
KB304-MNS-WP-B	numeric	silver	12	metal
KB1604-PNW	numeric	white	16	plastic
KB1604-PNB	numeric	black	16	plastic
KB1604-PAW	alphanumeric	white	16	plastic
KB1604-PAB	alphanumeric	black	16	plastic
KB1604-MNS-WP	numeric	silver	16	metal
KB1604-MNS-WP-B	numeric	silver	16	metal

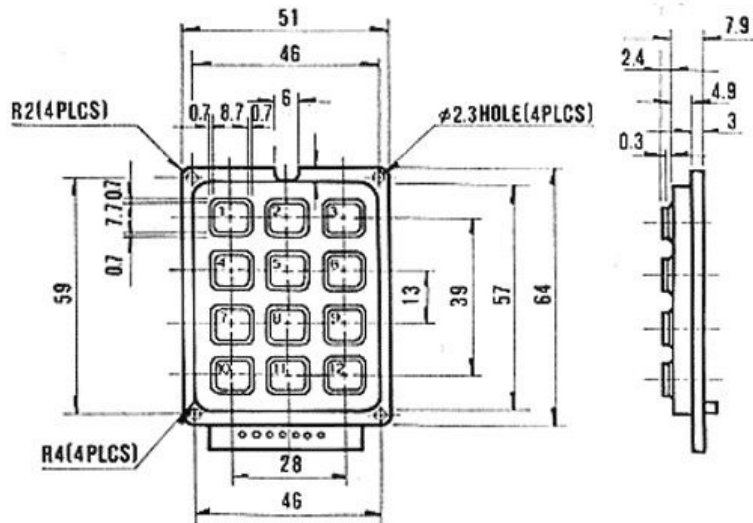

ACTUATING FORCE: 100 ± 30 GRAMS.
STROKE: 1.4 ± 0.4 mm.

Fig. 1-1.



OUTPUT ARRANGEMENT	
OUTPUT PIN NO.	SYMBOL
1	COL 2
2	ROW 1
3	COL 1
4	ROW 4
5	COL 3
6	ROW 3
7	ROW 2



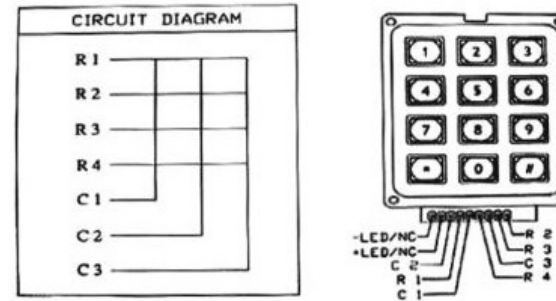


Fig. 2-2.

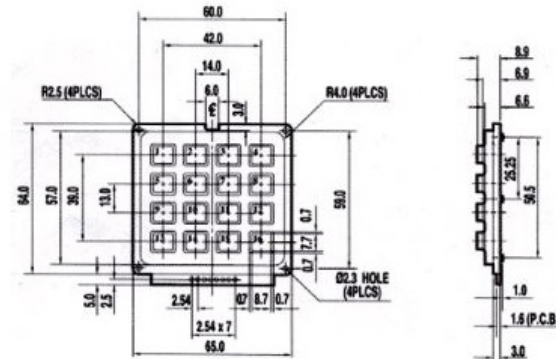

ACTUATING FORCE: 100 ± 30 GRAMS.
STROKE: 1.5 ± 0.5 mm.

Fig. 1-2.



OUTPUT ARRANGEMENT	
OUTPUT PIN NO.	SYMBOL
1	COL 1
2	COL 2
3	COL 3
4	COL 4
5	ROW 1
6	ROW 2
7	ROW 3
8	ROW 4