


SOLID STATE POWER RELAY 3A / 240V 1 x on – VR3SS1A

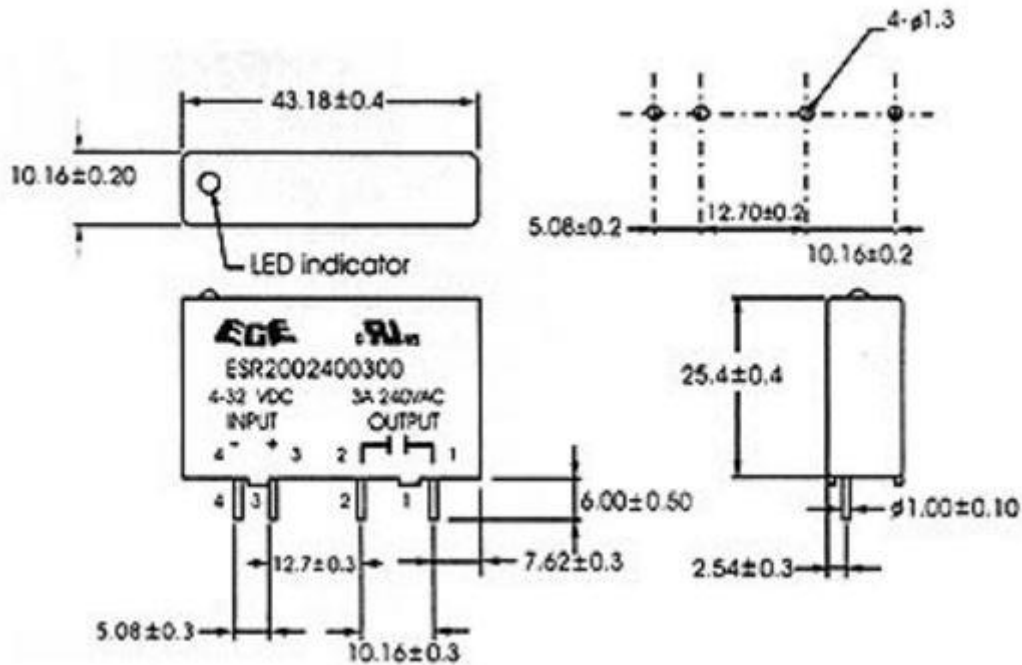

Features

- PCB mounting, single-in-line package
- optically isolated
- input LED indicator
- high dv/dt and high blocking voltage
- low input power consumption, TTL and CMOS compatible
- zero voltage activation, zero current deactivation (minimises EMI/RFI)
- high surge rating allows lamp and motor load switching
- built-in snubber network

Specifications

- coil voltage: 4-32Vdc
- input impedance: 2kohm
- contact: 1 x on
- load current: 3A / 240V
- input: 4-32Vdc