



FUSE SET 5 x 20mm FAST – K/FF

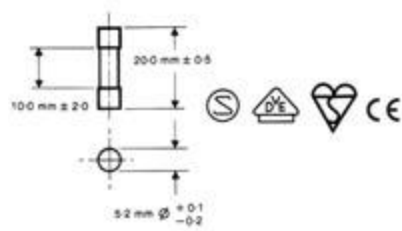

Features

- fast-acting
- 100 pieces:
 - 10 pieces of: 0.1A, 0.2A, 0.5A, 1A, 1.6A, 2A, 2.5A, 3A, 4A, 5A
- low breaking capacity

Specifications

- test specifications:
 - opening time:
 - 110% load: 4 hrs min.
 - 135% load: 1 hr max.
 - 200% load: 5 sec. max.
- packaging: plastic box with 10 compartments
- construction: glass cartridge, silvered caps
- specifications: IEC127, BS4265 and CEE4
- voltage rating: 250 VAC
- breaking capacity: 35 A
- endurance: cycling test as specified by IEC127 and BS4265
- ambient temperature: +15°C to +35°C according to IEC/BS, up to +70°C