


Modular Terminal Blocks with Screw-Clamp Connection, Pin Spacing 10 mm / 0.394 in; Series 239



Pin spacing 10 mm / 0.394 in
 2 x 0.75 – 2.5 mm² | 2 x AWG 18 – 14
 400 V/6 kV/3, 16 A | 300 V, 10 A
 800 V/6 kV/2, 16 A | 300 V, 10 A

Pin spacing 10 mm / 0.394 in
 2 x 0.75 – 2.5 mm² | 2 x AWG 18 – 14
 400 V/6 kV/3, 16 A | 300 V, 10 A
 800 V/6 kV/2, 16 A | 300 V, 10 A

Pin spacing 10 mm / 0.394 in
 2 x 0.75 – 2.5 mm² | 2 x AWG 18 – 14
 400 V/6 kV/3, 16 A | 300 V, 10 A
 800 V/6 kV/2, 16 A | 300 V, 10 A

6 – 8 mm / 0.28 in




6 – 8 mm / 0.28 in

6 – 8 mm / 0.28 in



*

*

*

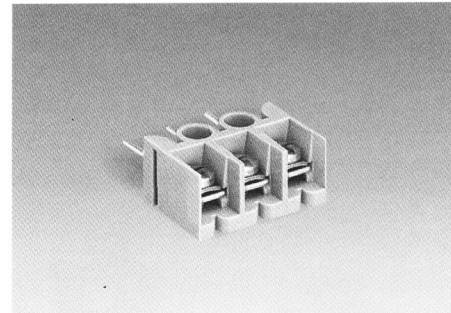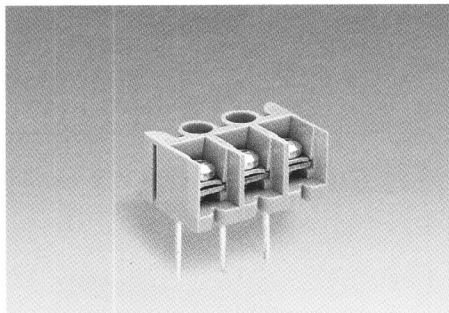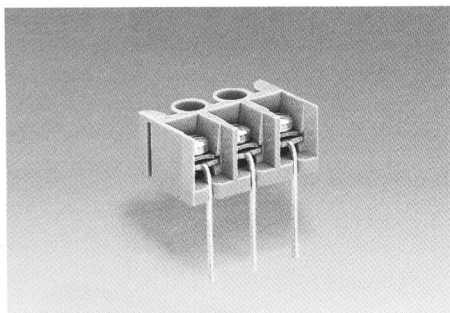


No. of poles	Item-No.	Pack.-unit pcs	No. of poles	Item-No.	Pack.-unit pcs	No. of poles	Item-No.	Pack.-unit pcs
Modular terminal blocks, grey			Modular terminal blocks, grey			Modular terminal blocks, grey		
Front solder pins, right-angle, 15 mm / 0.591 in long			Rear solder pins, right-angle, 15 mm / 0.591 in long			Rear solder pins, horizontal, 15 mm / 0.591 in long		
2	239-332	200	2	239-322	200	2	239-342	200
3	239-133	100	3	239-123	100	3	239-143	100
4	239-134	100	4	239-124	100	4	239-144	100
Front solder pins, right-angle, 4.5 mm / 0.177 in long			Rear solder pins, right-angle, 4.5 mm / 0.177 in long					
2	239-312	200	2	239-302	200			
3	239-113	100	3	239-103	100			
4	239-114	100	4	239-104	100			

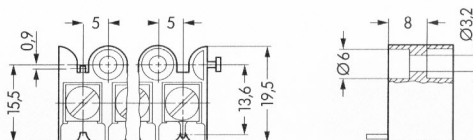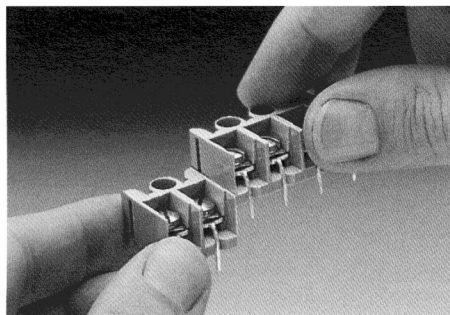

Assembling of modular terminal blocks

Dimensions of fixing holes

Dimensions (in mm) Diameter of drilled holes: 1.7^{+0.1} mm

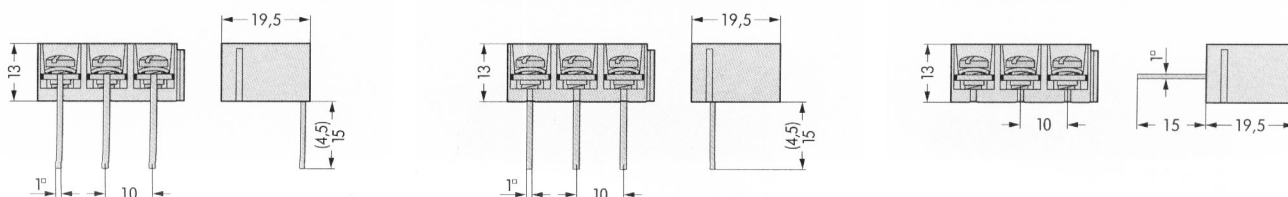

* For further approvals with corresponding ratings see pages 10,3 ff.