


FEATURES:

- ▲ P.C. BOARD MOUNTING
- ▲ SMALL SIZE AND LIGHTWEIGHT
- ▲ HIGH SOUND OUTPUT AND LOW CURRENT DRAIN

Model No.	SEP-2272	SEP-2272A
Oscillating Frequency(± 500Hz)	3,500	
Operating Voltage (VDC)	3~28	3~20
Sound Pressure Level at 30 cm/12VDC (dB min)	82	93
Current Consumption at 12VDC (mA max)	4	10
Tone	Continuous	
Operating Temperature (°C)	-20° ~ 60°	
Storage Temperature (°C)	-30° ~ 70°	
Weight (Gram)	7.9	7

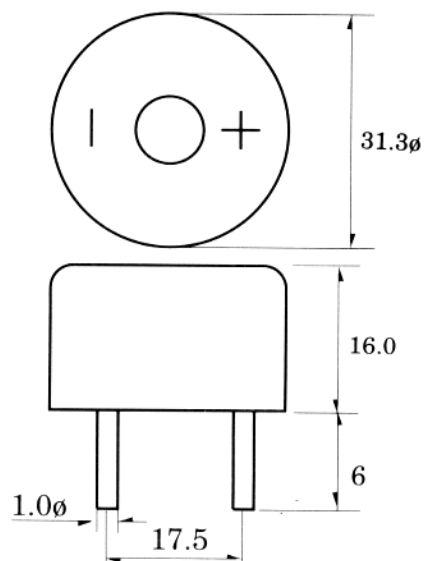

Model No	SEP-2276	SEP-2276A
Oscillating Frequency(±500 Hz)	2,800	
Operating Voltage (VDC)	3~20	3~20
Sound Pressure Level at 30 cm/12VDC (dB min)	71	83
Current Consumption at 12VDC (mA max)	5	9
Tone	Continuous	
Operating Temperature (°C)	-20° ~ 60°	
Storage Temperature (°C)	-30° ~ 70	
Weight (Gram)	7.2	

