

Printview: Female connector; with straight solder pins; 12-pole; Pin spacing 7.62 mm / 0.3 in; Solder pin 0.6x1 mm; codable; Vertical PCB mounting; with 2 locking latches - Item No.: 232-772



Female connector; with straight solder pins; 12-pole; Pin spacing 7.62 mm / 0.3 in; Solder pin 0.6x1 mm; codable; Vertical PCB mounting; with 2 locking latches

Item No.: 232-772



Female connector; with straight solder pins; 12-pole; Pin spacing 7.62 mm / 0.3 in; Solder pin 0.6x1 mm; codable; Vertical PCB mounting; with 2 locking latches

Marking

RoHS ✓
Compliant

Business data

Supplier	WAGO
Item no.	232-772
GTIN / EAN	4044918580014
Content	1
Order amount	25
Customer item number	

Notes

Item description: Integrated test ports for 2mm Ø test plugs For "board-to-board" and "board-to-wire" connections Touch-proof PCB outputs Easy-to-identify PCB inputs and outputs Coding option available

Technical data

Miscellaneous


No. of poles	12
Pin spacing	7.62 mm (0.3 in)
Color	orange

Printview: Female connector; with straight solder pins; 12-pole; Pin spacing 7.62 mm / 0.3 in; Solder pin 0.6x1 mm; codable; Vertical PCB mounting; with 2 locking latches - Item No.: 232-772


Technical data	
<i>Ratings per</i>	<i>IEC/EN 60664-1</i>
<i>Rated voltage (III / 3) [V]</i>	<i>500 [V]</i>
<i>Rated impulse voltage (III / 3) [kV]</i>	<i>6 [kV]</i>
<i>Rated voltage (III/2) [V]</i>	<i>630 [V]</i>
<i>Rated impulse voltage (III / 2) [kV]</i>	<i>6 [kV]</i>
<i>Rated voltage (II / 2) [V]</i>	<i>1000 [V]</i>
<i>Rated impulse voltage (II / 2) [kV]</i>	<i>6 [kV]</i>
<i>Rated current [A]</i>	<i>12 [A]</i>
<i>Number of levels</i>	<i>1</i>
<i>Solder pin length [mm]</i>	<i>5 [mm]</i>
<i>Drilled hole diameter (tolerance) [mm]</i>	<i>1.3(+ 0.1) [mm]</i>
<i>Drilled hole diameter [mm] [mm]</i>	<i>1.3 [mm]</i>
<i>Tolerance of drilled hole diameter plus [mm] [mm]</i>	<i>+0.1 [mm]</i>
<i>Material group</i>	<i>I</i>
<i>Insulating material</i>	<i>Polyamide 66 (PA 66)</i>
<i>Flammability class per UL94</i>	<i>V0</i>
<i>Limit temperature range</i>	<i>-60 ... 85 C</i>
<i>Contact material</i>	<i>Copper alloy</i>
<i>Contact plating</i>	<i>tin-plated</i>
<i>Fire load [MJ]</i>	<i>0.259 [MJ]</i>
<i>Weight [g]</i>	<i>13.27 [g]</i>
<i>Width</i>	<i>90.4 mm / 3.559 in.</i>
<i>Height</i>	<i>23.25 mm / 0.915 in.</i>
<i>Height from the surface</i>	<i>18.25 mm / 0.719 in.</i>
<i>Depth</i>	<i>11.6 mm / 0.457 in.</i>

Printview: Female connector; with straight solder pins; 12-pole; Pin spacing 7.62 mm / 0.3 in; Solder pin 0.6x1 mm; codable; Vertical PCB mounting; with 2 locking latches - Item No.: 232-772

Images & drawings

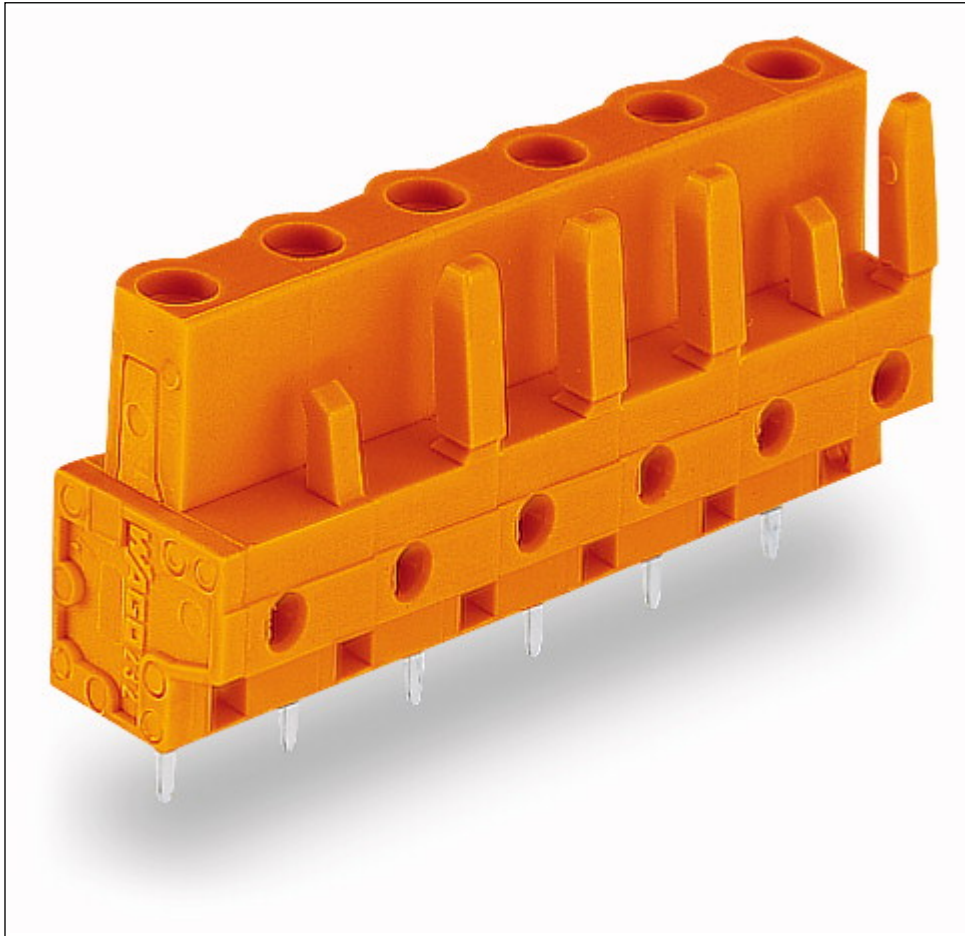

Printview: Female connector; with straight solder pins; 12-pole; Pin spacing 7.62 mm / 0.3 in; Solder pin 0.6x1 mm; codable; Vertical PCB mounting; with 2 locking latches - Item No.: 232-772

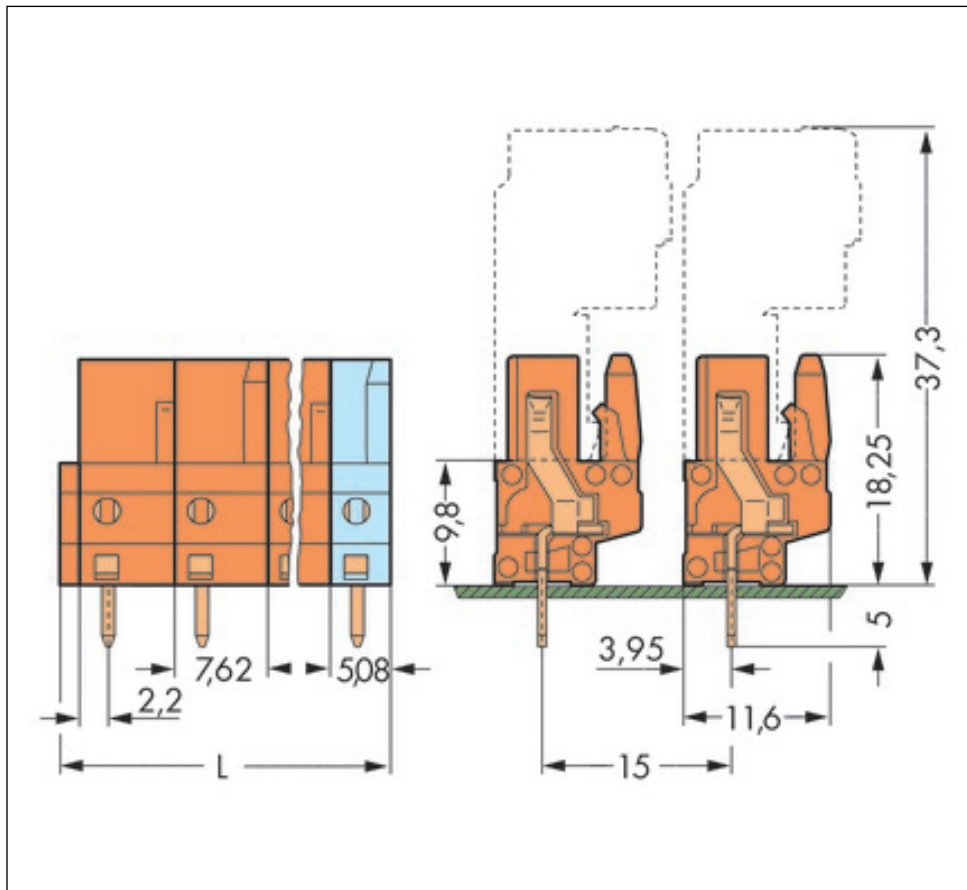

Address

WAGO Kontakttechnik GmbH & Co. KG

Hansastr. 27

32423 Minden

Telefon: 0571/887-0

Fax: 0571/887-169

<http://www.wago.com>

© WAGO Kontakttechnik GmbH & Co. KG

Technische Änderungen und Irrtümer vorbehalten.