




Multilevel installation terminal block; L/L/PE

Item No.: 775-645



Multilevel installation terminal block; L/L/PE

Marking

RoHS
Compliant

Business data

Supplier	WAGO
Item no.	775-645
GTIN / EAN	4044918649643
Content	1
Order amount	50
Customer item number	

Notes



Technical data

Miscellaneous

Total number of connection points	5
Total number of potentials	3
Potential marking	L/L/PE
Color	gray
Ratings note	potential-ground
Rated voltage (III / 3) [V]	250 [V]

Technical data	
<i>Rated impulse voltage (III / 3) [kV]</i>	<i>4 [kV]</i>
<i>Rated current [A]</i>	<i>20 [A]</i>
<i>Ratings note 2</i>	<i>potential-potential</i>
<i>Rated voltage (III / 3) 2 [V]</i>	<i>400 [V]</i>
<i>Rated current (2) [A]</i>	<i>25 [A]</i>
<i>Number of levels</i>	<i>3</i>
<i>Connection technology</i>	<i>CAGE CLAMP®</i>
<i>Number of connection points connector</i>	<i>5</i>
<i>Actuation type</i>	<i>Operating tool</i>
<i>Connectable conductor materials</i>	<i>Copper</i>
<i>Solid conductors, tool-operated termination</i>	<i>0.08 ... 2.5 mm² / 28 ... 12 AWG</i>
<i>Fine-stranded conductors, tool-operated termination</i>	<i>0.08 ... 4 mm² / 28 ... 12 AWG</i>
<i>Strip length</i>	<i>6 ... 7 mm / 0.24 ... 0.28 inch</i>
<i>Type of wiring</i>	<i>Front-entry wiring</i>
<i>Design</i>	<i>angled</i>
<i>Marking level</i>	<i>Center marking</i>
<i>Insulating material</i>	<i>Polyamide 66 (PA 66)</i>
<i>Fire load [MJ]</i>	<i>0.211 [MJ]</i>
<i>Weight [g]</i>	<i>15 [g]</i>
<i>Width</i>	<i>5 mm / 0.197 in.</i>
<i>Height from upper-edge of DIN-35 rail</i>	<i>43 mm / 1.693 in.</i>
<i>Depth</i>	<i>91 mm / 3.583 in.</i>
<i>Type of mounting</i>	<i>DIN-35 rail</i>

Images & drawings

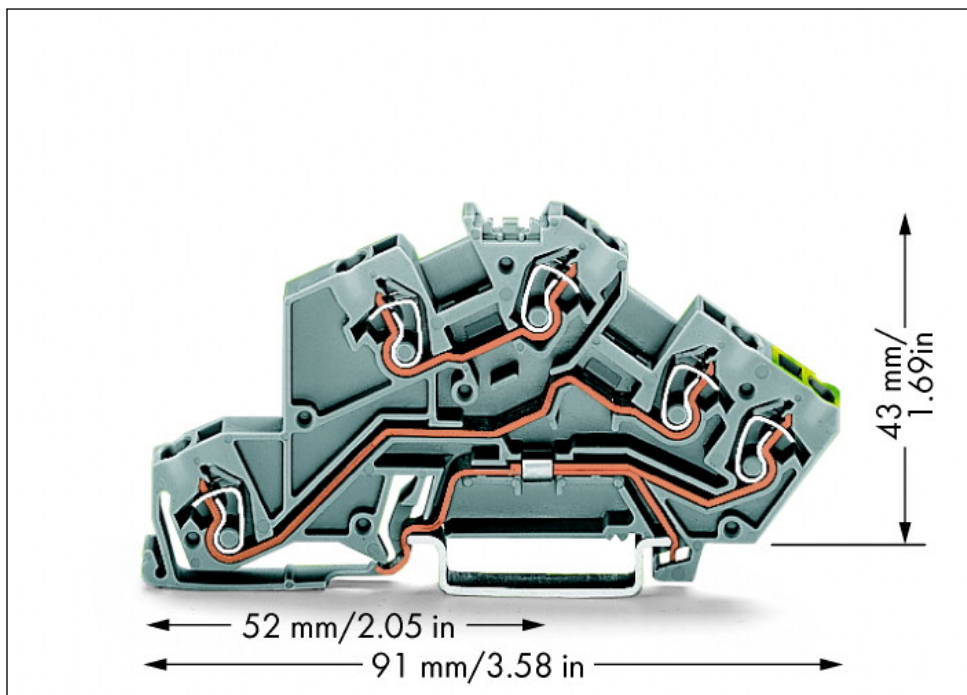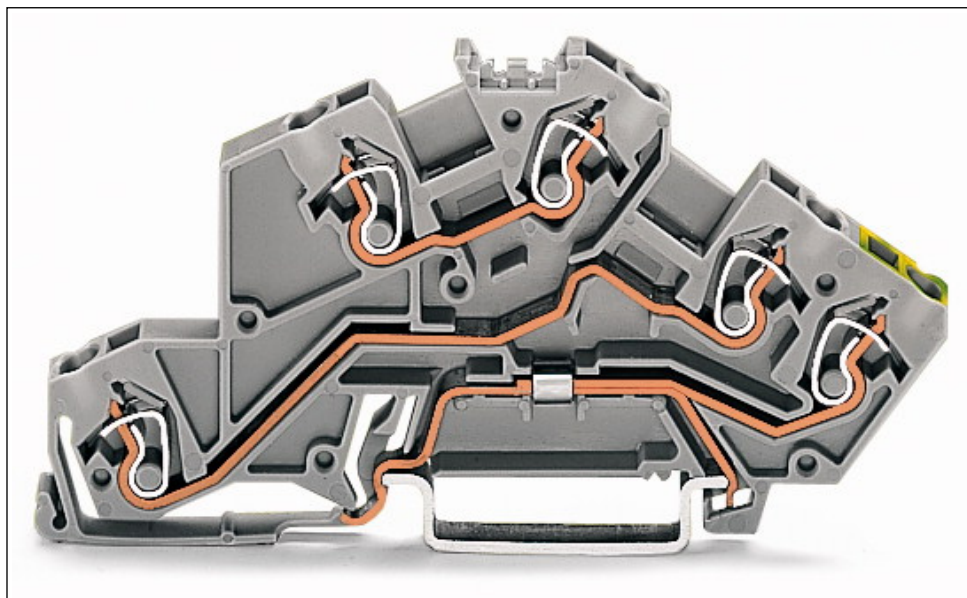

Address

WAGO Kontakttechnik GmbH & Co. KG

Hansastr. 27

32423 Minden

Telefon: 0571/887-0

Fax: 0571/887-169

<http://www.wago.com>

© WAGO Kontakttechnik GmbH & Co. KG

Technische Änderungen und Irrtümer vorbehalten.