

Specifications:


Current Rating:3.0A AC/DC
 Voltage Rating:250 AC/DC
 Contact Resistance:20m ohm. max.
 Insulation Resistance:1,000M ohm. min.
 Withstanding Voltage:600V AC For One Minute
 Operating Temperature Range:-40°C ~ +105°C

Material and Finish
 Insulator:PBT (UL94V-0)
 Insulator Color:Black
 Contact:Brass
 Plating:Gold Plated

How to Order

△ 2316R-XXG-XX


- Blank 6~40 Pin With One Key
- 1K:50~64 Pin With One Key
- 3K:50~64 Pin With Three Key
- Gold Plated
- No. of Positions
- Right Angle

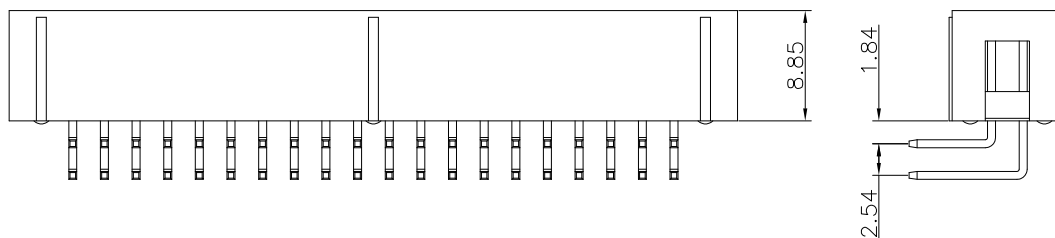

△ Notes:

No. Of Positions 50~64 With Three Key
 All Other Pin With One Key

Pos	Dim A	Dim B	Pos	Dim A	Dim B	Pos	Dim A	Dim B	Note
6	15.28	5.08	16	27.98	17.78	34	50.84	40.64	
8	17.82	7.62	20	33.06	22.86	40	58.46	48.26	
10	20.36	10.16	24	38.14	27.94	50	71.16	60.96	1K&3K
12	22.90	12.70	26	40.68	30.48	60	83.86	73.66	1K&3K
14	25.44	15.24	30	45.76	35.56	64	88.94	78.74	1K&3K

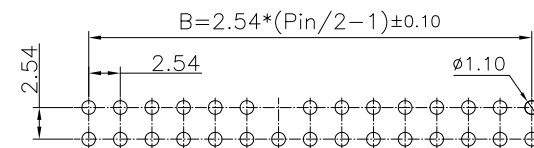

Recommended PCB Layout

RoHS Compliant

				DRAWN: Cel King	GENERAL TOLERANCE: .X=±0.20 .XX=±0.15	Neltron Industrial Co., Ltd.	
				CHECKED: Jeremy Liu	UNIT: MM		DESCRIPTION: 2.54mm Box Header R/A Type
C				APPROVAL: Mike Wu	SCALE:1:1	PART NO: 2316R-XXG	A4
B	06-Oct-2009	ECN-TW091001	Allen		SHEET: 1 / 1		
A	04-Aug-2005	(PC0001)	Cel king		PROJECTION:		
REV	DATE	FILE	BY				