
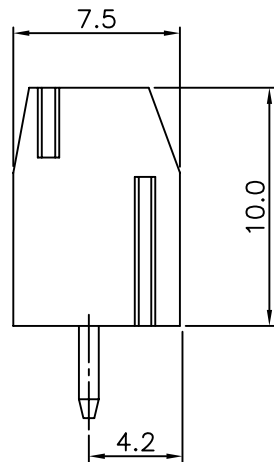


Section:A-A

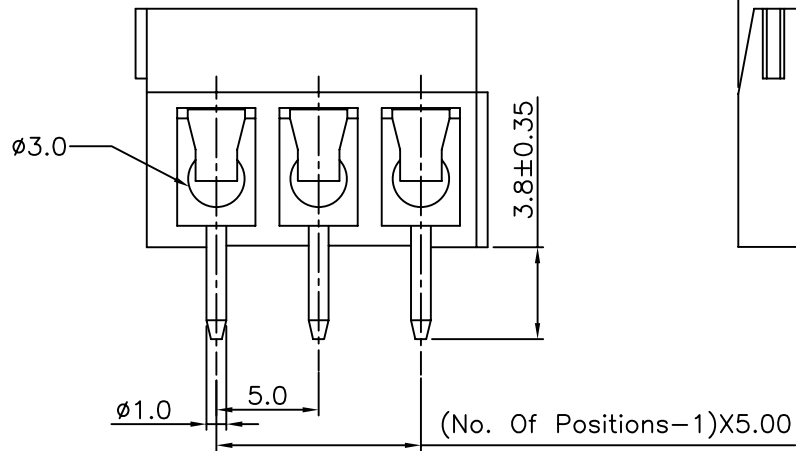

Specifications:

Current Rating:16.0A AC/DC  
 Voltage Rating:250V AC/DC  
 Contact Resistance:20m ohm Max  
 Insulation Resistance:5000M ohm Min.  
 Withstanding Voltage:2.000V AC For One Minute  
 Operating Temperature Range:-30°C ~ +105°C

Material and Finish  
 Insulator:Nylon66 (UL94V-0)


Contact Material:Brass(CuZn) With Tin Plated  
 Terminal Screw:Steel Yellow Chromated Zinc

"- "Slot Type


Wire guard:Stainless Steel

How To Order


5523S-XX-10-X

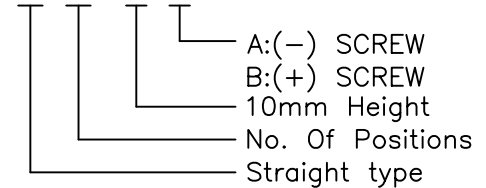


(No. Of Positions-1) X 5.00

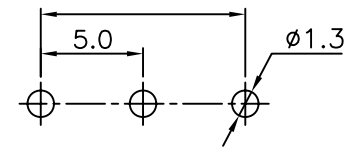

P.C.B. Layout



RoHS Compliant

F				DRAWN:	GENERAL TOLERANCE:	 <b>繼德工業股份有限公司</b> <b>Neltron Industrial Co., Ltd.</b>	DESCRIPTION:	SIZE	
E			HaiShan Zhou	.X=±0.20	5.0mm Pitch Terminal Block				A4
D			CHECKED:	.XX=±0.15					
C			Jeremy Liu	UNIT: MM					
B			APPROVAL:	SCALE:					
A	28-Sep-2006	(PC0183)	HaiShan Zhou	Mike Wu		SHEET: 1 / 1	PART NO:	5523S-XX-10-X	
REV	DATE	FILE	BY		PROJECTION:				

DRAWN:	GENERAL TOLERANCE:
HaiShan Zhou	.X=±0.20
CHECKED:	.XX=±0.15
Jeremy Liu	UNIT: MM
APPROVAL:	SCALE:
Mike Wu	SHEET: 1 / 1
	PROJECTION:

DESCRIPTION:	SIZE
5.0mm Pitch Terminal Block	A4
PART NO:	
5523S-XX-10-X	