


Miniature fuses TR5



Fuse fuse

Fuse miniature

Rated voltage 250 V AC

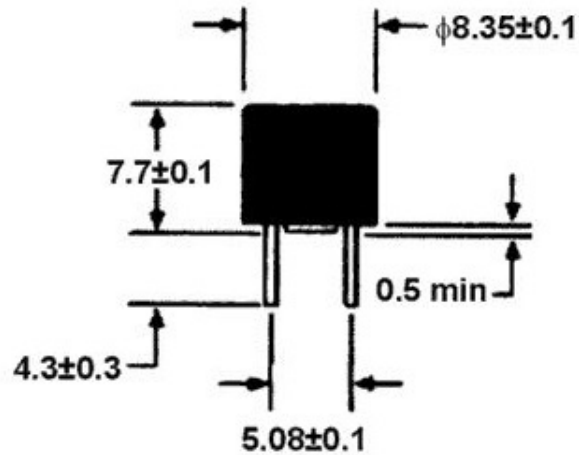

| Symbol | Manufacturer | Characterisitc | Size | Rated cur. [A] | Break. cap. [A] | Max volt. drop [V] | Terminal pitch [mm] |
|----------------------------|--------------|----------------|------|-------------------|--------------------|-----------------------|------------------------|
| RFT-0.08A | BEL FUSE | time-lag | - | 80 m | 35 | 400 m | 5.08 |
| RFT-0.125A | BEL FUSE | time-lag | - | 125 m | 35 | 300 | 5.08 |
| RFT-0.16A | BEL FUSE | time-lag | - | 160 m | 35 | 260 | 5.08 |
| RFT-0.1A | BEL FUSE | time-lag | - | 100 m | 35 | 350 m | 5.08 |
| RFT-0.25A | BEL FUSE | time-lag | - | 250 m | 35 | 220 m | 5.08 |
| RFT-0.2A | BEL FUSE | time-lag | - | 200 m | 35 | 230 m | 5.08 |
| RFT-0.315A | BEL FUSE | time-lag | - | 315 m | 35 | 190 m | 5.08 |
| RFT-0.4A | BEL FUSE | time-lag | - | 400 m | 35 | 160 m | 5.08 |
| RFT-0.5A | BEL FUSE | time-lag | - | 500 m | 35 | 150 m | 5.08 |
| RFT-0.63A | BEL FUSE | time-lag | - | 630 m | 35 | 130 m | 5.08 |
| RFT-0.8A | BEL FUSE | time-lag | - | 800 m | 35 | 120 m | 5.08 |
| RFT-1.25A | BEL FUSE | time-lag | - | 1.25 | 35 | 100 m | 5.08 |
| RFT-1.6A | BEL FUSE | time-lag | - | 1.6 | 35 | 95 m | 5.08 |
| RFT-1A | BEL FUSE | time-lag | - | 1 | 35 | 110 m | 5.08 |
| RFT-2.5A | BEL FUSE | time-lag | - | 2.5 | 35 | 87 m | 5.08 |
| RFT-2A | BEL FUSE | time-lag | - | 2 | 35 | 90 m | 5.08 |
| RFT-3.15A | BEL FUSE | time-lag | - | 3.15 | 35 | 83 m | 5.08 |
| RFT-4A | BEL FUSE | time-lag | - | 4 | 40 | 80 m | 5.08 |
| RFT-5A | BEL FUSE | time-lag | - | 5 | 50 | 77 m | 5.08 |
| RFT-6.3A | BEL FUSE | time-lag | - | 6.3 | 63 | 73 m | 5.08 |