


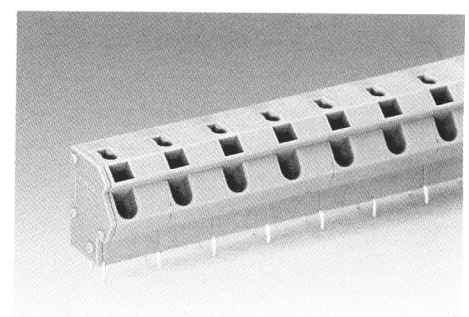


Single-Conductor PCB Terminal Strips; Series 254, Pin Spacings 5/5.08 mm / 0.2 in; 7.5/7.62 mm / 0.3 in; 10/10.16 mm / 0.4 in

Front-entry

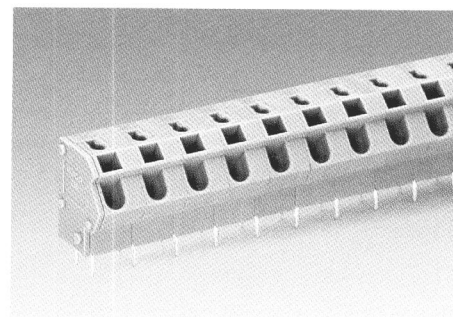

<p>Pin spacing 5/5.08 mm / 0.2 in 0.5 – 2.5 mm² "s" AWG 20–12 "sol." 250 V/4 kV/3, 10 A 300 V, 10 A 500 V/4 kV/2, 10 A 300 V, 10 A </p> <p> 10 – 12 mm / 0.43 in</p> <p>* </p>	<p>Pin spacing 7.5/7.62 mm / 0.3 in 0.5 – 2.5 mm² "s" AWG 20–12 "sol." 400 V/6 kV/3, 10 A 300 V, 10 A 800 V/6 kV/2, 10 A 300 V, 10 A </p> <p> 10 – 12 mm / 0.43 in</p> <p>* </p>	<p>Pin spacing 10/10.16 mm / 0.4 in 0.5 – 2.5 mm² "s" AWG 20–12 "sol." 630 V/8 kV/3, 10 A 300 V, 10 A 1250 V/8 kV/2, 10 A 300 V, 10 A </p> <p> 10 – 12 mm / 0.43 in</p> <p>* </p>
--	--	---

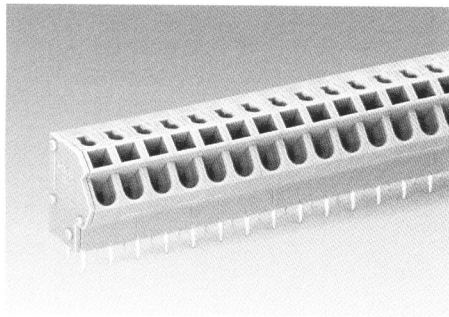


No. of poles	Item-No.	Pack.-unit pcs	No. of poles	Item-No.	Pack.-unit pcs	No. of poles	Item-No.	Pack.-unit pcs
Single-conductor terminal strips, grey, 2 solder pins/pole, standard lengths			Single-conductor terminal strips, grey, 2 solder pins/pole, standard lengths			Single-conductor terminal strips, grey, 2 solder pins/pole, standard lengths		
2	254-452	420 (4 x 105)	2	254-552	280 (4 x 70)	2	254-652	200 (4 x 50)
3	254-453	280 (4 x 70)	3	254-553	200 (4 x 50)	3	254-653	140 (4 x 35)
4	254-454	220 (4 x 55)	4	254-554	140 (4 x 35)	4	254-654	100 (4 x 25)
5	254-455	180 (4 x 45)	5	254-555	120 (4 x 30)	5	254-655	80 (4 x 20)
6	254-456	140 (4 x 35)	6	254-556	100 (4 x 25)	6	254-656	80 (4 x 20)
7	254-457	120 (4 x 30)	7	254-557	80 (4 x 20)	7	254-657	80 (4 x 20)
8	254-458	100 (4 x 25)	8	254-558	80 (4 x 20)	8	254-658	60 (4 x 15)
9	254-459	100 (4 x 25)	9	254-559	60 (4 x 15)	9	254-659	40 (4 x 10)
10	254-460	80 (4 x 20)	10	254-560	60 (4 x 15)	10	254-660	40 (4 x 10)
12	254-462	80 (4 x 20)	12	254-562	40 (4 x 10)	12	254-662	40 (4 x 10)
16	254-466	60 (4 x 15)	16	254-566	40 (4 x 10)	16	254-666	20 (4 x 5)
24	254-474	40 (4 x 10)	24	254-574	20 (4 x 5)	24	254-674	20 (4 x 5)
36	254-486	20 (4 x 5)						
48	254-498	20 (4 x 5)						

For assemblies in other lengths and colors, please contact factory.

For assemblies in other lengths and colors, please contact factory.

For assemblies in other lengths and colors, please contact factory.

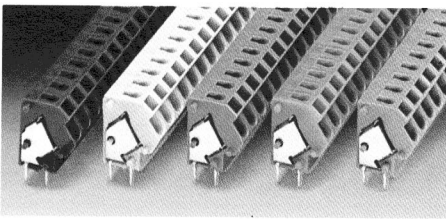


- Additional item-Nos. for colored terminal strips
- blue .../000-006
 - dark grey .../000-008
 - light grey .../000-009
 - orange .../000-012
 - light green .../000-017


- Ordering examples
- 1-cond. terminal strip, pin spacing 5/5.08 mm/0.2 in 8-pole, orange: **254-458/000-012**
 - 1-cond. terminal strip, pin spacing 7.5/7.62 mm/0.3 in 12-pole, blue: **254-562/000-006**

With blue insulating housings suitable for EEx i applications (only pin spacings 7.5/7.62 mm/0.3 in + 10/10.16 mm/0.4 in)


Dimensions (in mm) (Adjustment of pin spacing is made by pulling on the end blocks so that they expand to satisfy the hole centers required.)

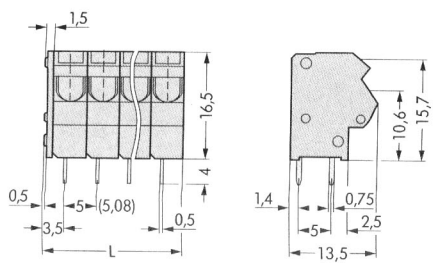

Diameter of drilled hole: 1.1^{+0.1} mm
L = (No. of poles x pin spacing) + 1.5 mm

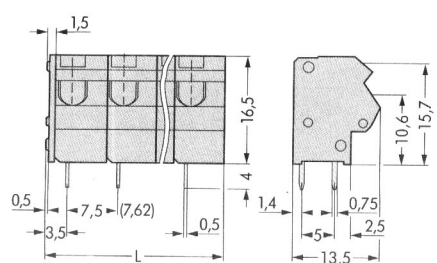

Diameter of drilled hole: 1.1^{+0.1} mm
L = (No. of poles x pin spacing) + 1.5 mm

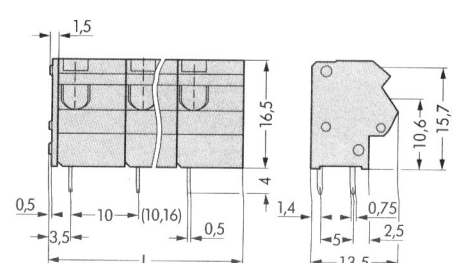

Diameter of drilled hole: 1.1^{+0.1} mm
L = (No. of poles x pin spacing) + 1.5 mm