



SMD PCB terminal block; Push-button; 0.75 mm²; Pin spacing 4 mm; 2-pole; Push-in CAGE CLAMP®; in tape-and-reel packaging

Item No.: 2060-402/998-404



SMD PCB terminal block; Push-button; 0.75 mm²; Pin spacing 4 mm; 2-pole; Push-in CAGE CLAMP®; in tape-and-reel packaging

Marking

RoHS ✓
Compliant

Business data

| | |
|----------------------|------------------|
| Supplier | WAGO |
| Item no. | 2060-402/998-404 |
| GTIN / EAN | 4050821377863 |
| Content | 1 |
| Order amount | 1,000 |
| Customer item number | |

Notes

Item description: SMD PCB terminal blocks with Push-in CAGE CLAMP® connection and push-buttons Height of just 4.5 mm minimizes on-board LED shadowing Available in tape-and-reel packaging for automated assembly *Recommendation:* For new designs please only use the new white 2060 Series version! **HIER KLICKEN!**

Technical data

Miscellaneous

| | |
|--------------|-----------------|
| No. of poles | 2 |
| Pin spacing | 4 mm (0.157 in) |


| Technical data | |
|---|--|
| Total number of connection points | 2 |
| Total number of potentials | 2 |
| Color | white |
| Ratings per | IEC/EN 60664-1 |
| Rated voltage (III / 3) [V] | 63 [V] |
| Rated impulse voltage (III / 3) [kV] | 2.5 [kV] |
| Rated voltage (III/2) [V] | 160 [V] |
| Rated impulse voltage (III / 2) [kV] | 2.5 [kV] |
| Rated voltage (II / 2) [V] | 320 [V] |
| Rated impulse voltage (II / 2) [kV] | 2.5 [kV] |
| Rated current [A] | 9 [A] |
| Number of connection objects | 1 |
| Number of levels | 1 |
| Connection technology | Push-in CAGE CLAMP® |
| Number of connection points connector | 1 |
| Actuation type | Operating lever |
| Solid conductors, tool-operated termination | 0.2 ... 0.75 mm ² / 24 ... 18 AWG |
| Fine-stranded conductors, tool-operated termination | 0.2 ... 0.75 mm ² / 24 ... 18 AWG |
| Fine-stranded conductors with insulated ferrule | 0.25 ... 0.34 mm ² / ... |
| Fine-stranded conductors with uninsulated ferrule | 0.25 ... 0.34 mm ² / ... |
| Strip length | 6 ... 7 mm / 0.24 ... 0.28 inch |
| Conductor entry angle to the PCB [°] | 0 [°] |
| Cross section from (1) [AWG] | 24 [AWG] |
| Cross section from (2) [mm ²] | 0.2 [mm ²] |
| Cross section up to (2) [mm ²] | 0.75 [mm ²] |
| Cross section from (2) [AWG] | 24 [AWG] |
| Cross section up to (2) [AWG] | 18 [AWG] |
| Solder pad dimensions [mm] | 6 x 2 [mm] |
| Reel diameter of tape-and-reel packaging [mm] | 330 [mm] |
| Tape width [mm] | 24 [mm] |
| Material group | I |
| Insulating material | Polyphthalamide (PPA GF) |
| Flammability class per UL94 | V0 |
| Limit temperature range | -60 ... 105 C |


Printview: SMD PCB terminal block; Push-button; 0.75 mm²; Pin spacing 4 mm; 2-pole; Push-in CAGE CLAMP®; in tape-and-reel packaging - Item No.: 2060-402/998-404

| Technical data | |
|-------------------------|----------------------------|
| <i>Contact material</i> | <i>Copper alloy</i> |
| <i>Contact plating</i> | <i>tin-plated</i> |
| <i>Weight [g]</i> | <i>0.923 [g]</i> |
| <i>Width</i> | <i>7.9 mm / 0.311 in.</i> |
| <i>Height</i> | <i>4.5 mm / 0.177 in.</i> |
| <i>Depth</i> | <i>13.1 mm / 0.516 in.</i> |

Images & drawings



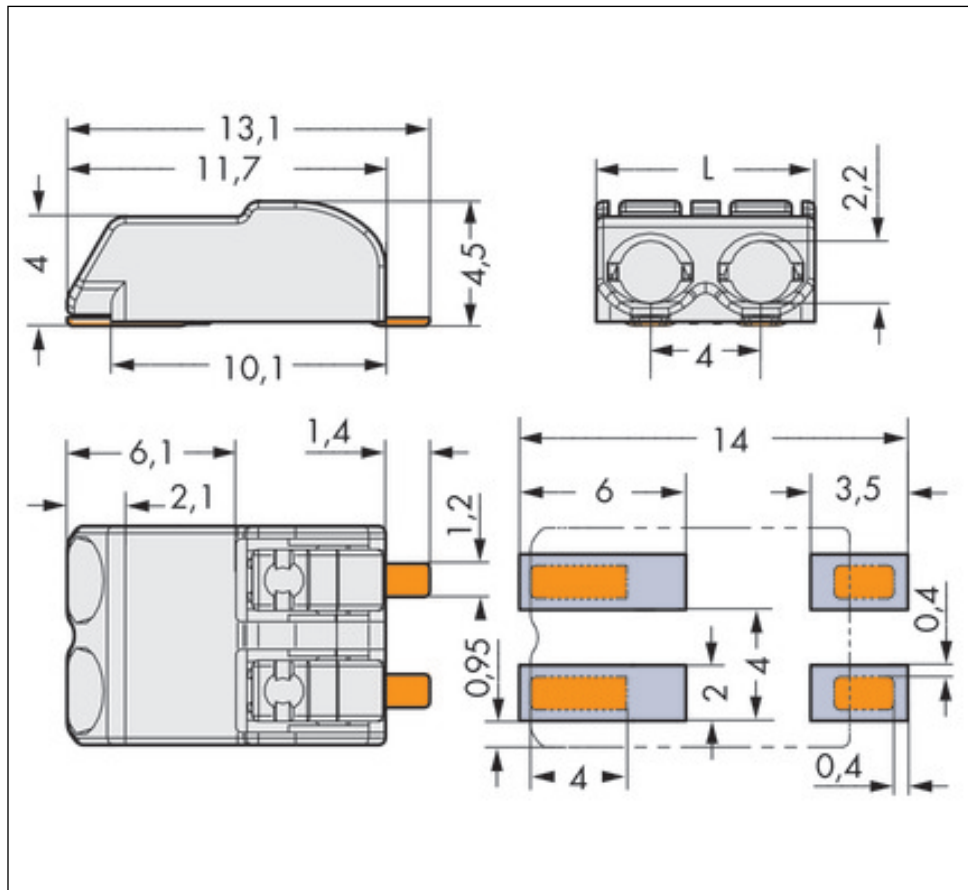

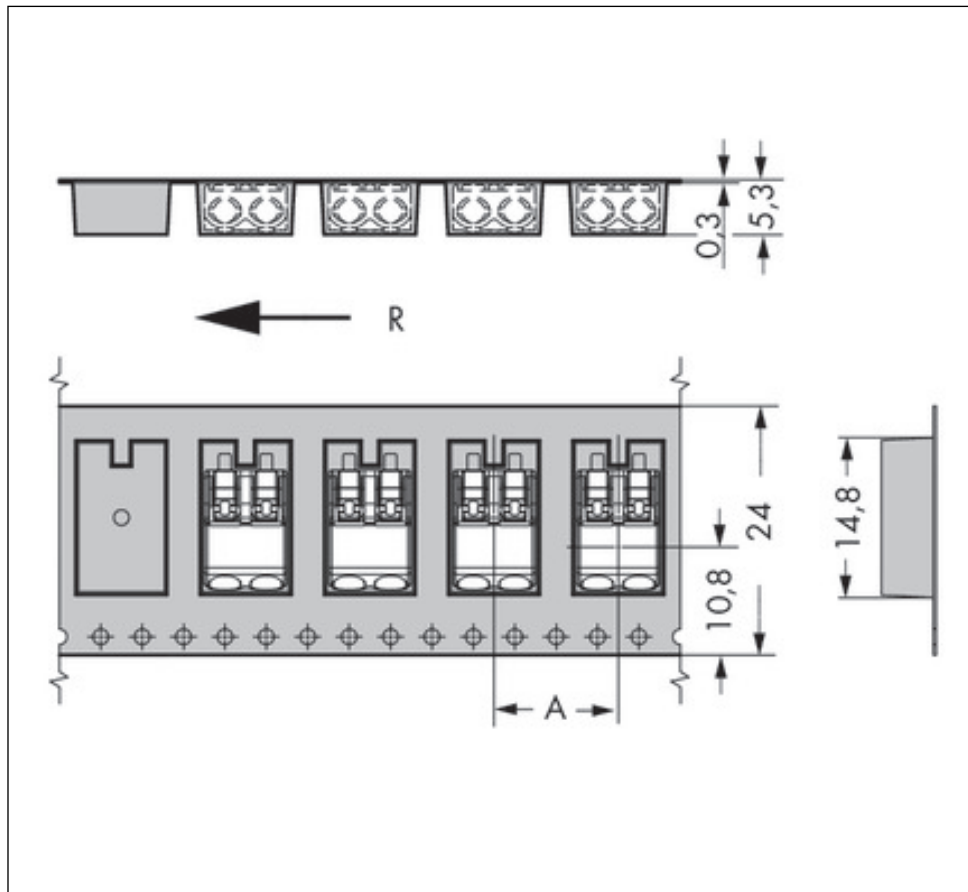

Address

WAGO Kontakttechnik GmbH & Co. KG

Hansastr. 27

32423 Minden

Telefon: 0571/887-0

Fax: 0571/887-169

<http://www.wago.com>

© WAGO Kontakttechnik GmbH & Co. KG

Technische Änderungen und Irrtümer vorbehalten.