

■ Specifications



1. Current Rating: 2.0A AC/DC.
2. Voltage Rating: 250V AC/DC.
3. Contact Resistance: 20m ohm. max.
4. Insulation Resistance: 1000M ohm. Min.
5. Withstanding Voltage: 500V AC for one minute.
6. Operating Temperature Range: -40°C to +105°C.

■ Material and Finish

1. Insulator:  
Standard: PBT (UL94V-0);  
High Temperature Material (UL94V-0).
2. Insulator Height: 1.5/2.0/3.0mm, (Detail Spec, Consult to sales dept).
3. Contact: Copper Alloy.
4. Plating: Gold Plated.


■ Feature

1. Design for Home Appliances, Aviation Electronics, Automobile Electronics and Computer(PC) Peripherals.

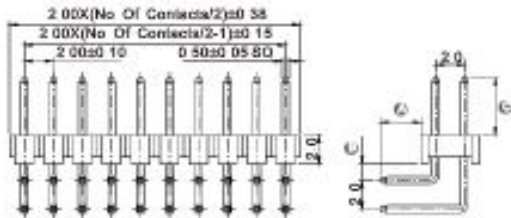


P/N: 2208R-XXG (A=2.8, B=1.1, C=4.0 Standard Type)

A/B/C/D Dimension To Be Advised By Value Customers



P/N: 2208S-XXG (A=2.8, B=4.0 Standard Type)

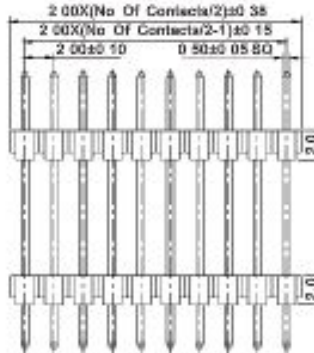

P/N: 2208DI-XXG-XXXX

■ Ordering Information

**2208S-XXG-XXXX**

① ② ③ ④

① S: Straight Double Rows	③ G: Gold Plated T: Tin Plated	④ Blank: Standard Type XXXX: Special Length C Dimension
② No. Of Contacts (4 To 80 Ways)		

**2208DI-XXG-XXXX**

① ② ③ ④

① DI: Double Insulator	③ G: Gold Plated T: Tin Plated	④ XXXX: Special Length D Dimension
② No. Of Contacts (4 To 80 Ways)		

**2208R-XXG-XXXX**

① ② ③ ④

① R: Right Angle Double Rows	③ G: Gold Plated T: Tin Plated	④ Blank: Standard Type XXXX: Special Length A/B/C Dimension
② No. Of Contacts (4 To 80 Ways)		

■ Recommended PCB Layout

