


FEATURES:

- ▲ SMALL SIZE, LIGHTWEIGHT
- ▲ P.C. BOARD MOUNTING
- ▲ LOW POWER CONSUMPTION
- ▲ HIGH EFFICIENCY
- ▲ SEP-1162 WAVE SOLDERABLE AND WASHABLE

Model No	SEP-1160 (Unsealed)	SEP-1162 (Sealed)
Resonant Frequency ($\pm 500\text{Hz}$)	4,000	
Operating Voltage (Vp-p max)	20	
Sound Pressure Level at 10cm 10Vp-p square wave (dB min)	76	80
	at 4.0 KHz	
Current Consumption (mA max)	10	7
Capacitance ($\pm 30\% \text{pF}$)	17,000	14,000
Operating Temperature ($^{\circ}\text{C}$)	$-30^{\circ} \sim 70^{\circ}$	
Storage Temperature ($^{\circ}\text{C}$)	$-30^{\circ} \sim 80^{\circ}$	
Weight (Gram)	0.7	0.85

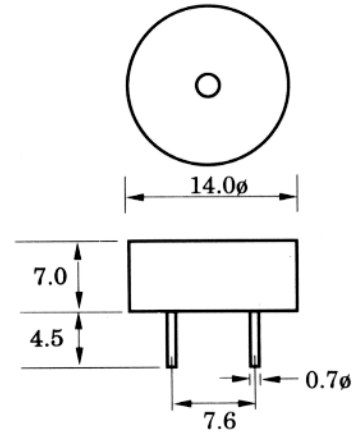

Model No	SEP-1152
Resonant Frequency ($\pm 500\text{ Hz}$)	5,000
Operating Voltage (Vp-p max)	15
Sound Pressure Level at 10cm 10Vp-p square wave (dB min)	85
	at 5.0 KHz
Current Consumption (mA max)	11
Capacitance ($\pm 30\% \text{pF}$)	15,000
Operating Temperature ($^{\circ}\text{C}$)	$-20^{\circ} \sim 60^{\circ}$
Storage Temperature ($^{\circ}\text{C}$)	$-30^{\circ} \sim 70^{\circ}$
Weight (Gram)	1.0

