



MESH NETWORKING  
EMBEDDED RF  
MODULES FOR OEMS



# XBEE® DIGIMESH® 2.4

Embedded RF modules deliver wireless connectivity using the innovative and easy-to-deploy DigiMesh protocol

XBee and XBee-PRO DigiMesh 2.4 embedded RF modules provide wireless connectivity to electronic devices using a globally deployable 2.4 GHz transceiver. These modules use the DigiMesh networking protocol. This innovative, peer-to-peer mesh network offers users added network stability through self-healing, dense network operation and support for sleeping routers, extending the operational life of battery dependent networks.

XBee modules are ideal for low-power applications. XBee-PRO modules are power-amplified versions of XBee modules for extended-range applications. Products in the XBee family are easy to use, share a common hardware


footprint, and are fully interoperable with other XBee products utilizing the same technology. They are available in a variety of different protocols to suit different applications, enabling users to substitute one XBee module for another with minimal development time and risk.

Digi's unsurpassed offering of XBee products provide users with seamless communication between devices. XBee adapters deliver wireless connectivity to electronic devices in wired networks. ConnectPort® X gateways enable users to access and configure remote devices in a network.


## BENEFITS

- No configuration needed for out-of-the-box RF communications
- Common XBee footprint for a variety of RF modules
- Simple topology to deploy and grow
- 2.4 GHz for worldwide deployment
- Low-power XBee or extended-range XBee-PRO (pin/over-the-air compatible)
- Multiple antenna options
- Outdoor RF line-of-sight range up to 1 mile (1.6 km) with high-gain antennas
- DigiMesh peer-to-peer mesh networking protocol
  - Self-healing and discovery for network stability
  - Sleeping routers supported for long battery life

## RELATED PRODUCTS

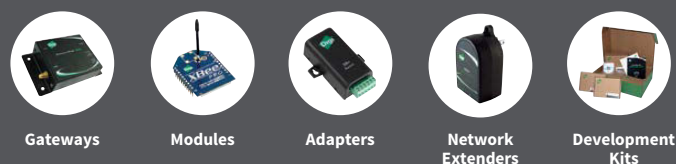

## APPLICATION EXAMPLE

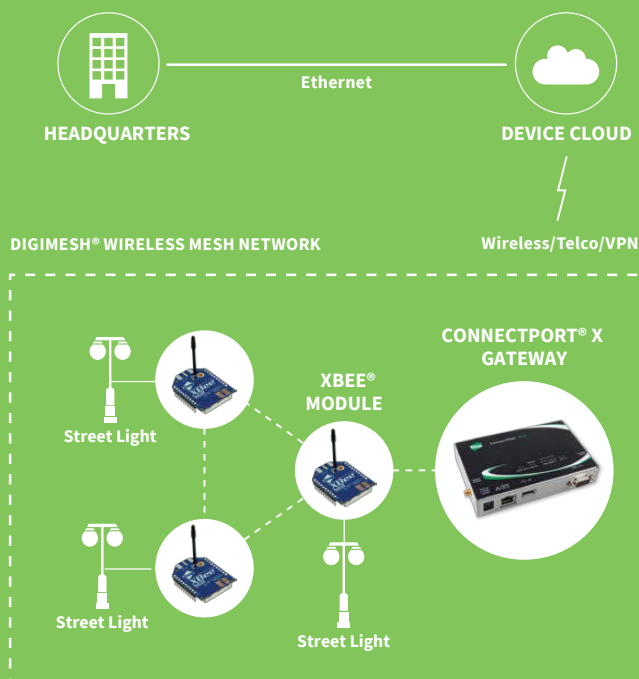


SPECIFICATIONS	XBee® DigiMesh® 2.4		XBee-PRO® DigiMesh® 2.4	XBee-PRO® DigiMesh® 2.4 (Int'l)
PERFORMANCE				
RF DATA RATE	250 Kbps			
INDOR/URBAN RANGE	100 ft (30 m)	300 ft (90 m)		200 ft (60 m)
OUTDOOR/RF LINE-OF-SIGHT RANGE	300 ft (90 m)	1 mile (1.6 km)		2500 ft (750 m)
TRANSMIT POWER	1 mW (+0 dBm)	63 mW (+18 dBm)		10 mW (+10 dBm)
RECEIVER SENSITIVITY (1% PER)	-92 dBm	-100 dBm		
FEATURES				
SERIAL DATA INTERFACE	3.3V CMOS serial UART			
CONFIGURATION METHOD	AT & API			
FREQUENCY BAND	2.4 GHz ISM			
INTERFERENCE IMMUNITY	DSSS (Direct Sequence Spread Spectrum)			
SERIAL DATA RATE	Up to 115.2 Kbps			
ADC INPUTS	(6) 10-bit ADC inputs			
DIGITAL I/O	13			
ANTENNA OPTIONS	Chip, Wire Whip, U.FL, RPSMA			
NETWORKING & SECURITY				
ENCRYPTION	128-bit AES			
RELIABLE PACKET DELIVERY	Retries/Acknowledgments			
ADDRESSING OPTIONS	PAN ID, channel, 64-bit address			
CHANNELS	16	12		
POWER REQUIREMENTS				
SUPPLY VOLTAGE	2.8 – 3.4VDC			
TRANSMIT CURRENT	45 mA	250 mA (Wire, Chip, U.FL), 340 mA (RPSMA)		150 mA (Wire, Chip, U.FL), 180 mA (RPSMA)
RECEIVE CURRENT	50 mA	55 mA		
POWER-DOWN CURRENT	<50 uA			
REGULATORY APPROVALS				
FCC (USA)	Yes			
IC (CANADA)	Yes			
ETSI (EUROPE)	Yes	Yes (Max Tx 10 mW)		Yes
C-TICK AUSTRALIA	Yes			
TELEC (JAPAN)	Yes	No		Yes


DigiMesh




Side Views



Top View



Top View



PART NUMBERS	DESCRIPTION
XB24-DMDK	North American/International (except Japan) DigiMesh 2.4 Development Kit w/ 2 XBee and 2 XBee-PRO modules
XB24-DMDK-WJ	Japan DigiMesh 2.4 Development Kit w/ 2 XBee and 2 XBee-PRO modules (International)
XB24-DMUIT-250	XBee DigiMesh 2.4 low power module w/ U.FL connector
XB24-DMSIT-250	XBee DigiMesh 2.4 low power module w/ RPSMA connector
XB24-DMWIT-250	XBee DigiMesh 2.4 low power module w/ wire antenna
XB24-DMPIT-250	XBee DigiMesh 2.4 low-power module w/ PCB antenna
XBP24-DMSIT-250	XBee-PRO DigiMesh 2.4 extended range module w/ RPSMA connector
XBP24-DMSIT-250J	XBee-PRO DigiMesh 2.4 extended range module w/ RPSMA connector (International)
XBP24-DMWIT-250	XBee-PRO DigiMesh 2.4 extended range module w/ wire antenna
XBP24-DMWIT-250J	XBee-PRO DigiMesh 2.4 extended range module w/ wire antenna (International)
XBP24-DMUIT-250	XBee-PRO DigiMesh 2.4 extended range module w/ U.FL connector
XBP24-DMUIT-250J	XBee-PRO DigiMesh 2.4 extended range module w/ U.FL connector (International)
XBP24-DMPIT-250	XBee-PRO DigiMesh 2.4 extended range module w/ PCB antenna
XBP24-DMPIT-250J	XBee-PRO DigiMesh 2.4 extended range module w/ PCB antenna (International)

FOR MORE INFORMATION  
PLEASE VISIT [WWW.DIGI.COM](http://WWW.DIGI.COM)

**DIGI SERVICE AND SUPPORT** / You can purchase with confidence knowing that Digi is always available to serve you with expert technical support and our industry leading warranty. For detailed information visit [www.digi.com/support](http://www.digi.com/support).

© 1996-2016 Digi International Inc. All rights reserved.  
All trademarks are the property of their respective owners.

91001486  
C2/316

**DIGI INTERNATIONAL WORLDWIDE HQ**  
877-912-3444 / 952-912-3444 / [www.digi.com](http://www.digi.com)

**DIGI INTERNATIONAL FRANCE**  
+33-1-55-61-98-98 / [www.digi.fr](http://www.digi.fr)

**DIGI INTERNATIONAL JAPAN**  
+81-3-5428-0261 / [www.digi-intl.co.jp](http://www.digi-intl.co.jp)

**DIGI INTERNATIONAL SINGAPORE**  
+65-6213-5380

**DIGI INTERNATIONAL CHINA**  
+86-21-50492199 / [www.digi.com.cn](http://www.digi.com.cn)

