


SILVER OXIDE



Industry Standard Dimensions

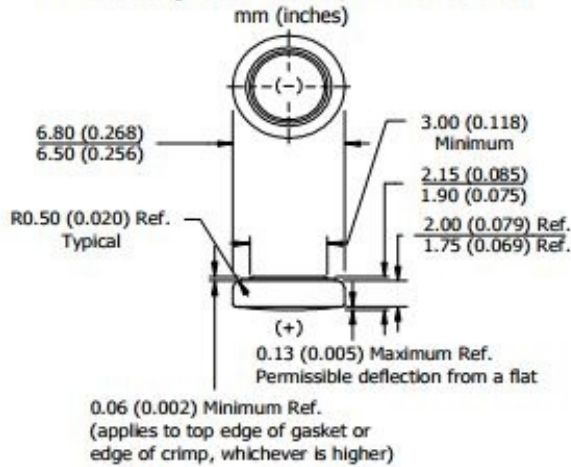


DESIGNED FOR USE ON CONTINUOUS LOW DRAIN
HIGH PULSE ON DEMAND

Specifications

Chemical System: Silver Oxide (Zn/Ag_2O)
Designation: IEC-SR60
Nominal Voltage: 1.55 Volts
Typical Capacity: 23 mAh* (to 1.2 volts)
Capacity Test: 68K ohm continuous drain at 21°C
Typical Weight: 0.37 grams
Typical Volume: 0.08 cubic centimeters
Impedance (40 Hz): 5 to 15 ohms

* Varies according to the applied load, temperature, and cutoff voltage.

Cross Section

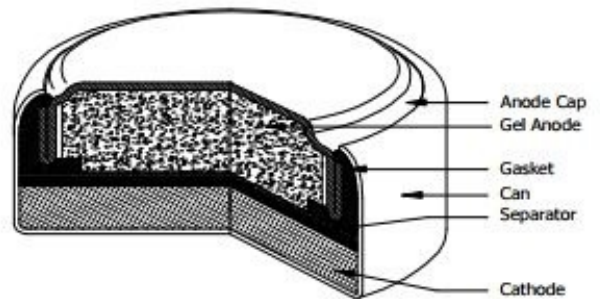

Typical Discharge Characteristics

Typical Performance at 21°C (70°F)

Schedule: Continuous
Typical Drain @ 1.47V:
 0.022 milliamperes
Load: 68K ohm




| Schedule | Typical Drains at 1.47V (milliamperes) | Load (ohm) | Cutoff 1.2V (hours) |
|------------|--|---------------|---------------------------|
| Continuous | 0.022 | 68K | 1,045 |

Temperature Characteristics

Typical Performance at Low Discharge Rates

Service Effects

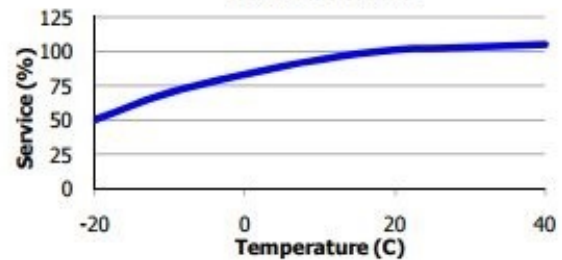

Storage Effects

