


Sockets for the JW Relay

JW ACCESSORIES


Approved models, (€

DIN mounting


PCB mounting



Dimensions

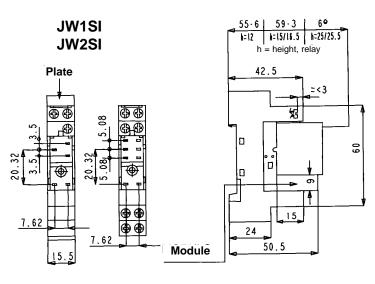






Accessories

Retaining spring, relay JWHFSI



H (height relay) = 20,4 mm

Retaining spring, relay JWHFI



H (height relay) = 20,4 mm

MODULES supporting the relays HJ / HC

	Description	Voltage	Schematic	LED color	Туре
	Module with diode. Protection against inverting polarity.	5/230 V DC 6/230 V DC	-A1		1 2
	Module with diode and LED. Protection against inverting polarity plus illuminated signal.	6/24 V DC 24/60 V DC	-A2	LED red	4 4 B
	Module "RC" series. Without signal. RC circuit.	5/24 V DC	A2		5 B
	Module with signal LED. No protection against inverting polarity. AC or DC power supply possible.	5/24 V AC / DC 110/230 V AC / DC	= A2 - H=	LED red LED red	5 9

MODULES supporting the relay JW

	Description	Voltage	Schematic	LED color	Туре
	Module with diode and LED. Protection against inverting polarity plus illuminated signal.	6/24 V DC 24/60 V DC	-A2	LED red LED red	42 42 B
	Module with signal LED. No protection against inverting polarity. AC or DC power supply possible.	6/24 V AC / DC 24/60 V AC / DC	=A2	LED red LED red	62 62 E