



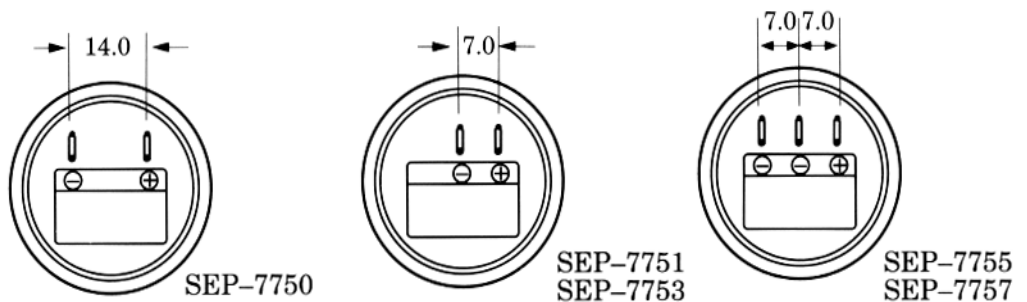

- ▲ FRONT- INSERTED PANEL MOUNTING TYPE
- ▲ FITS 1.25 INCH (31.75MM) OPENING IN PANELS UP TO 0.50 INCH (12.7MM) THICK
- ▲ 3 DIFFERENT TONES AND COMBINATIONS ARE AVAILABLE
- ▲ SUPPLIED WITH 0.187 INCH (4.75MM) QUICK DISCONNECT TABS

Model No	SEP-7750	SEP-7751	SEP-7753	SEP-7755	SEP-7757
Operating Frequency (±500 Hz)	3,600				
Operating Voltage (VDC)	4~28	6~28		6~28	
Sound Pressure Level at 60 cm (dB min)	70~85				
Current Consumption (mA max)	4~18				
Tone	Continuous	Fast Pulse	Slow Pulse	Continuous + Fast Pulse	Continuous + Slow Pulse
Operating Temperature (°C)	-20° ~ 60°				
Storage Temperature (°C)	-30° ~ 70°				
Weight (Gram)	17.0	20.0		21.0	

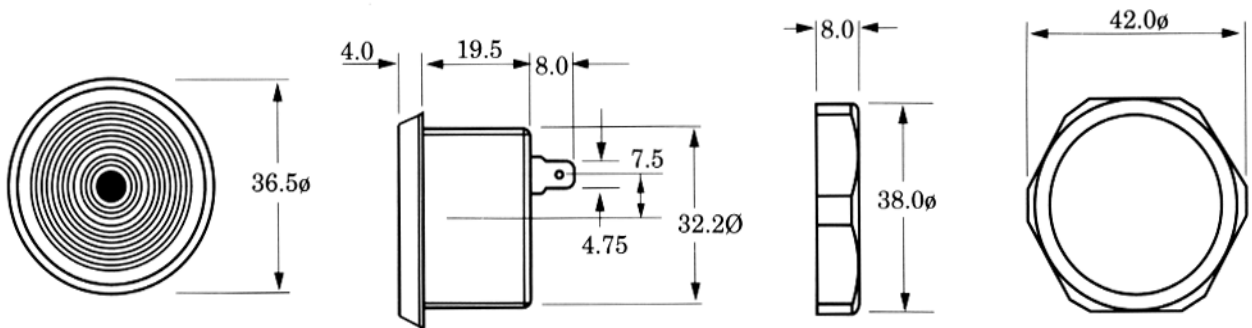

Pulse Rate at 12 VDC:
 Fast pulse : 3.5±20% Hz
 Slow pulse : 1.2±20% Hz