
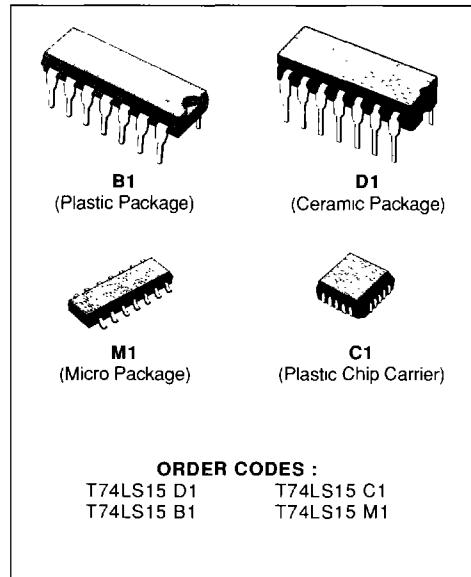


TRIPLE 3-INPUT AND GATE

DESCRIPTION

The T74LS15 is a high speed TRIPLE 3-INPUT AND GATE (with open collector output) fabricated in LOW POWER SCHOTTKY technology.


SCHEMATIC

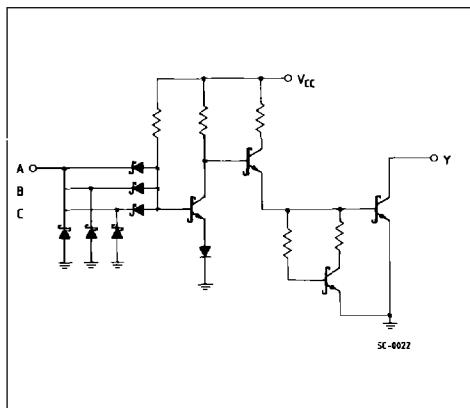

ORDER CODES :

T74LS15 D1 T74LS15 C1
 T74LS15 B1 T74LS15 M1

PIN CONNECTION (top view)

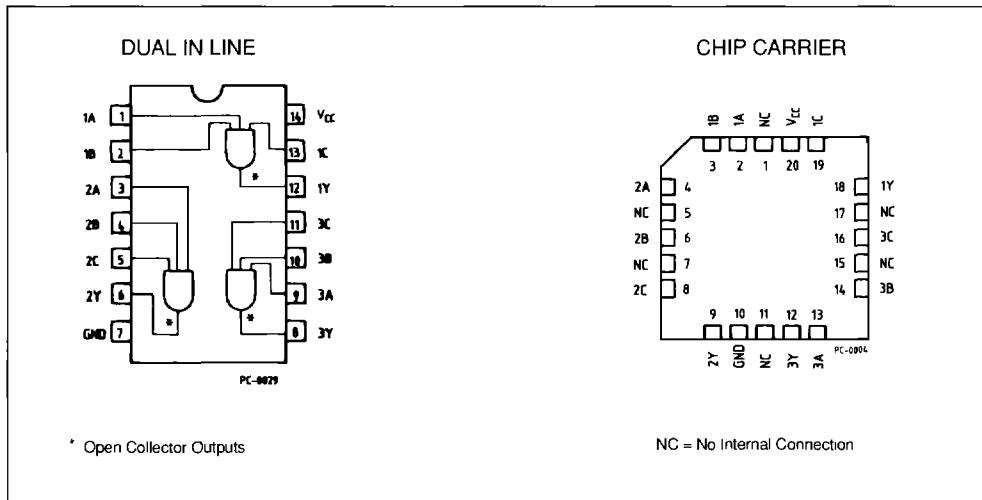

LOGIC DIAGRAM AND TRUTH TABLE

	<table border="1" style="margin-left: auto; margin-right: auto;"> <thead> <tr> <th>A</th><th>B</th><th>C</th><th>Y</th></tr> </thead> <tbody> <tr> <td>L</td><td>X</td><td>X</td><td>L</td></tr> <tr> <td>X</td><td>L</td><td>X</td><td>L</td></tr> <tr> <td>X</td><td>X</td><td>L</td><td>L</td></tr> <tr> <td>H</td><td>H</td><td>H</td><td>H</td></tr> </tbody> </table>	A	B	C	Y	L	X	X	L	X	L	X	L	X	X	L	L	H	H	H	H	L = LOW Voltage Level H = HIGH Voltage Level X = Don't Care
A	B	C	Y																			
L	X	X	L																			
X	L	X	L																			
X	X	L	L																			
H	H	H	H																			

ABSOLUTE MAXIMUM RATINGS

Symbol	Parameter	Value	Unit
V _{CC}	Supply Voltage	- 0.5 to 7	V
V _I	Input Voltage, Applied to Input	- 0.5 to 15	V
V _O	Output Voltage, Applied to Output	- 0.5 to 10	V
I _I	Input Current, into Inputs	- 30 to 5	mA
I _O	Output Current, into Outputs	50	mA

Stresses in excess of those listed under "Absolute Maximum Ratings" may cause permanent damage to the device.
This is a stress rating only and functional operation of the device at these or any other conditions in excess of those indicated in the operational sections of this specification is not implied. Exposure to absolute maximum rating conditions for extended periods may affect device reliability.

GUARANTEED OPERATING RANGE

Part Numbers	Supply Voltage			Temperature
	Min.	Typ.	Max.	
T74LS15XX	4.75 V	5.0 V	5.25 V	0 °C to + 70 °C

XX = package type.

DC CHARACTERISTICS OVER OPERATING TEMPERATURE RANGE

Symbol	Parameter	Limits			Test Condition (note 1)	Unit
		Min.	Typ. (*)	Max.		
V _{IH}	Input HIGH Voltage	2.0			Guaranteed Input HIGH Voltage	V
V _{IL}	Input LOW Voltage			0.8	Guaranteed Input LOW Voltage	V
V _{CD}	Input Clamp Diode Voltage	- 0.65	- 1.5		V _{CC} = MIN, I _{IN} = - 18 mA	V
I _{OH}	Output HIGH Current			100	V _{CC} = MIN, V _{OH} = 5.5 V V _{IN} = V _{IH}	µA
V _{OL}	Output LOW Voltage	0.25	0.4	I _{OL} = 4.0 mA	V _{CC} = MIN	V
		0.35	0.5	I _{OL} = 8.0 mA	V _{IN} = V _{IL}	V
I _{IH}	Input HIGH Current		1.0	20	V _{CC} = MAX, V _{IN} = 2.7 V	µA
				0.1	V _{CC} = MAX, V _{IN} = 7.0 V	mA
I _{IL}	Input LOW Current			- 0.4	V _{CC} = MAX, V _{IN} = 0.4 V	mA
I _{CCH}	Supply Current HIGH		1.8	3.6	V _{CC} = MAX, Inputs Open	mA
I _{CLL}	Supply Current LOW		3.3	6.6	V _{CC} = MAX, V _{IN} = 0 V	mA

Notes : 1. For conditions shown as MIN or MAX, use the appropriate value specified under guaranteed operating ranges.

(*) Typical values are at V_{CC} = 5.0 V, T_A = 25 °C.

AC CHARACTERISTICS: $T_A = 25^\circ\text{C}$ (for AC test circuits and waveforms see databook introduction)

Symbol	Parameter	Limits			Test Conditions	Unit
		Min.	Typ.	Max.		
t_{PLH}	Turn Off Delay, Input to Output		20	35	$V_{CC} = 5.0 \text{ V}$ $C_L = 15 \text{ pF}, R_L = 2.0 \text{ k}\Omega$	ns
t_{PHL}	Turn On Delay, Input to Output		17	35		ns