



1

2

3

4

5



Specifications:

Current rating:3A AC/DC

Voltage Rating:250V AC/DC

Contact Resistance:20m ohm Max

Insulation Resistance:1000M ohm Min

Withstanding Voltage:600V AC For one Minute

Operating Temperature Range:-40°C To +105°C

Materials:

Insulator:PBT (UL94V-0)

Insulator Color:Black




Contact:Copper Alloy

Plating:Gold Plated

How To Order

2211S-XXG

G:Gold Plated
No.of Positions
Straight Type

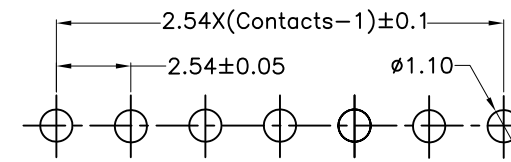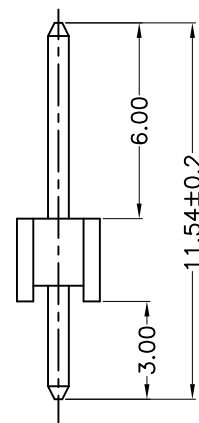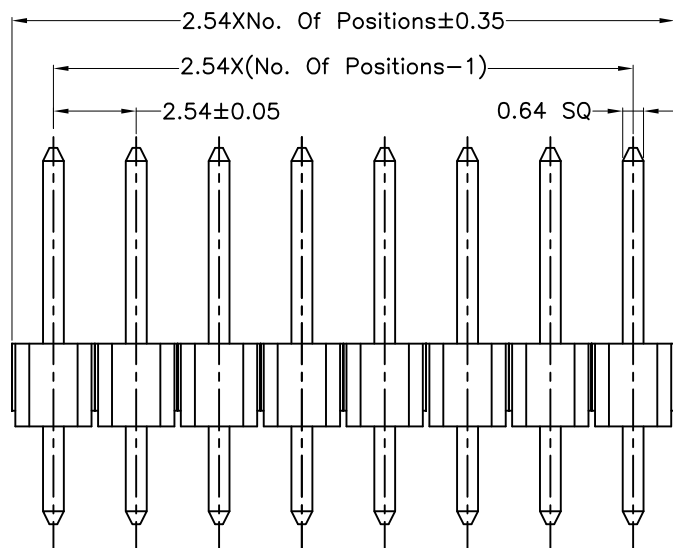

PCB Layout

RoHS Compliant

F				DRAWN: Cel King	GENERAL TOLERANCE: .X=±0.20 .XX=±0.15	繼德工業股份有限公司 Neltron Industrial Co., Ltd.	DESCRIPTION: 2.54mm Pin Header Single Row Straight Type	SIZE A4
E			CHECKED: Jeremy Liu					
D				APPROVAL: Mike Wu	SCALE: 1:1	PART NO: 2211S-XXG		
C					SHEET: 1 / 1			
B				APPROVAL: Mike Wu	PROJECTION:			
A	25-Oct-2005	(PC0001)	Cel King					
REV	DATE	FILE	BY					