


DIMENZIJE TOROIDNIH TRANSFORMATORJEV

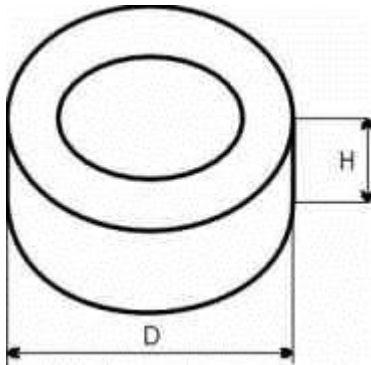

MOČ	premer D	višina H	teža
VA	mm	mm	kg
20	60	30	0,4
30	69	32	0,5
	80	25	0,5
50	75	38	0,7
	79	33	0,7
	109	22	0,7
	61	50	0,7
60	80	38	0,8
80	90	33	1,0
	83	37	1,0
100	92	38	1,1
	110	29	1,1
120	93	45	1,3
150	95	46	1,5
	130	34	1,5
200	115	43	2,0
	140	32	2,0
250	116	50	2,3
300	118	58	2,4
	144	37	2,4
400	132	56	3,3
500	134	69	3,8
600	136	73	4,4
800	158	59	5,4
1000	168	65	6,5

1500	175	80	10,0
2000	195	80	11,0
2500	200	87	12,5
3000	240	90	17,0
4000	260	92	22,0
5000	280	95	26,0