AC/DC 100W Enclosed Switching Power Supply MORNSUN®

LM100-20Bxx, LM100-20Bxx-C, LM100-20Bxx-Q Series





















FEATURES

- Universal 85 264VAC or 120 370VDC input voltage
- Accepts AC or DC input (dual-use of same terminal)
- Operating ambient temperature range: -30℃ to +70℃
- Low standby power consumption, high efficiency
- High I/O isolation test voltage up to 4000VAC
- Low ripple & noise
- Output short circuit, over-current, over-voltage protection
- OVC III (designed to meet EN61558)
- Operating up to 5000m altitude

LM100-20Bxx series is one of Mornsun's enclosed AC-DC switching power supply. It features universal AC input and at the same time accepts DC input voltage, cost-effective, low no load power consumption, high efficiency and high reliability. These converters offer excellent EMC performance and meet IEC/EN61000-4, CISPR32/EN55032, IEC/EN/UL62368, EN60335, GB4943, EN61558 standards and they are widely used in areas of industrial, LED, street light control, electricity, security, telecommunications, smart home etc.

Selection G	Suide					
Certification	Part No.*	Output Power (W)	Nominal Output Voltage and Current (Vo/Io)	Output Voltage Adjustable Range (V)	Efficiency at 230VAC (%) Typ.	Capacitive Load (uF) Max.
	LM100-20B05	90	5V/18A	4.5-5.5	85	10000
	LM100-20B12	102	12V/8.5A	10.2-13.8	86.5	6800
UL/EN/CCC/	LM100-20B15	105	15V/7.0A	13.5-18	86.5	3300
IEC/BIS	LM100-20B24	108	24V/4.5A	21.6-28.8	89.5	2200
	LM100-20B36	100.8	36V/2.8A	32.4-39.6	89.5	1000
	LM100-20B48	110.4	48V/2.3A	43.2-52.8	90.5	470

Input Specifications								
Item	Operating Condition	ns		Min.	Тур.	Max.	Unit	
Innut Voltage Dange	AC input			85		264	VAC	
Input Voltage Range	DC input			120		370	VDC	
Input Voltage Frequency			47		63	Hz		
1101	115VAC					3		
Input Current	230VAC				1.5		Α	
Inrush Current	115VAC			35				
illustr Culletti	230VAC Cold start			65				
Leakage Current	240VAC			< 0.7	5mA			
Hot Plug				Unava	ailable			

Output Specifications							
Item	Operating Conditions		Min.	Тур.	Max.	Unit	
Output Voltage Accuracy	Full le sud vers sus	5V	-	±2	-		
	Full load range	12V/15V/24V/36V/48V	-	±1			
Line Regulation	Rated load	Rated load		±0.5		%	
Load Regulation	0% - 100% load	5V	-	±1	-		
	0% - 100% 10dd	12V/15V/24V/36V/48V		±0.5			

MORNSUN®

AC/DC 100W Enclosed Switching Power Supply MORNSUN®

LM100-20Bxx, LM100-20Bxx-C, LM100-20Bxx-Q Series



		5V	_	100			
Outrout Disputs O. Naises	20MHz bandwidth	12V/15V	-	120		\/	
Output Ripple & Noise*	(peak-to-peak value)	24V	-	150		mV	
		36V/48V		200			
Temperature Coefficient		·		±0.03		%/℃	
Minimum Load			0	_		%	
Stand-by Power	000) (4.0	5V/12V/15V/24V		_	0.3	147	
Consumption	230VAC	36V/48V	_	_	0.5	W	
Halalana Tha a	115VAC		5	5 10			
Hold-up Time	230VAC		45	45 55		ms	
Short Circuit Protection	Recovery time < 5s after the short circuit disappear.		Hiccu	Hiccup, continuous, self-recovery			
Over-current Protection			110	110% - 160% lo, self-recovery			
	5V		≤7.5VDC	≤7.5VDC (Output voltage turn off, hiccu or clamp)			
	12V		≤19.2	≤19.2VDC (Output voltage turn off, hiccup or clamp)			
Owner Brown Broke office	15V		≤24VDC	24VDC (Output voltage turn off, hic or clamp)		off, hiccup	
Over-voltage Protection	24V		≤38.4VDC (Output voltage turn of hiccup or clamp)		turn off,		
	36V		≤57.6	VDC (Outpu	ıt voltage t	turn off,	
	48V		≤60VDC	(Output vol	hiccup or clamp) 60VDC (Output voltage turn off, hiccup or clamp)		

Note: *The "Tip and barrel method" is used for ripple and noise test, output parallel 47uF electrolytic capacitor and 0.1uF ceramic capacitor, please refer to Enclosed Switching Power Supply Application Notes for specific information.

General	Specification	ons						
Item		Operating Conditions			Min.	Тур.	Max.	Unit
Input -	Electric strength test for 1min., leakage current <3mA		2000					
	Input - output	Electric strength test for 1r leakage current <5mA	Electric strength test for 1min., leakage current <5mA Electric strength test for 1min., leakage current <5mA		4000			
Isolation	Output - 🖶				1250			VAC
	Input - 😩				2000			
	Input - output	Electric strength test for 1r leakage current < 10mA	nin.,	5V/12V/15V/48V	4000			
	Output - 🕀		ioanago canom viena		1250	60		
Insulation	Input - 🕀				100			M Ω
Resistance	Input - output	At 500VDC			100			
Resistance	Output - 😩				100			
Operating Te	emperature						+70	°C
Storage Tem	perature				-40		+85	
Storage Hum	nidity	Non condensing			10		95	9/ DL I
Operating Humidity		Non-condensing			20		90	%RH
Switching Fre	equency					65		kHz
		Operating temperature	5V output	+45 °C to +70 °C	1.6			
Power Derat	ing	derating	Other output	+50°C to +70°C	2.0			%/ ℃
		Input voltage derating	85VAC-115VAC	;	0.67			%/VAC

MORNSUN®

AC/DC 100W Enclosed Switching Power Supply MORNSUN®

LM100-20Bxx, LM100-20Bxx-C, LM100-20Bxx-Q Series





Safety Standard	IEC/UL62368-1, GB4943.1, IS13252 (Part1), EN60335-1, EN61558-1 safety approved & EN62368-1, BS EN 62368-1 (Report)
Safety Class	CLASSI
MTBF	MIL-HDBK-217F@25°C >30,0000 h

Mechanical Specifications				
Case Material	Metal (AL1100, SGC	CC)		
Dimension	129.00 x 97.00 x 30.0	0mm		
VA/alaba	325g (Typ.)	5V		
Weight	305g (Typ.)	12V/15V/24V/36V/48V		
Cooling Method	Free air convection			

Electromagnetic Co	ompatibility (EMC)				
	CE	CISPR32/EN55032	CLASS B		
Emissions	RE	CISPR32/EN55032	CLASS B		
	Harmonic current	IEC/EN61000-3-2	CLASS A		
	ESD	IEC/EN61000-4-2	Contact ±6KV/Air ±8KV	perf. Criteria A	
	RS	IEC/EN61000-4-3	10V/m	perf. Criteria A	
	EFT	IEC/EN61000-4-4	±2KV	perf. Criteria A	
Immunity	Surge	IEC/EN61000-4-5	line to line ±2KV/line to ground ±4KV	perf. Criteria A	
	CS	IEC/EN61000-4-6	10 Vr.m.s	perf. Criteria A	
	Voltage dip, short interruption and voltage variation	IEC/EN61000-4-11	0%, 70%	perf. Criteria B	


Product Characteristic Curve

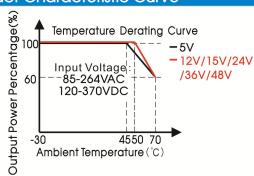




Note: 1. With an AC input voltage between 85-115 VAC and a DC input between 120-163 VDC the output power must be derated as per the temperature derating curves;

- 2. This product is suitable for applications using natural air cooling; for applications in closed environment please consult Mornsun FAE.
- 3. Product start at 50% output power under low temperature and low input voltage (-30 $^{\circ}$, below 100VAC).

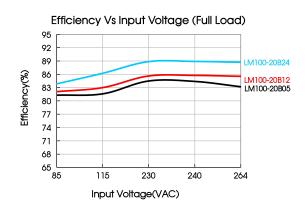

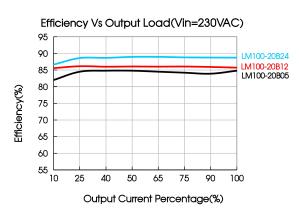


MORNSUN®


AC/DC 100W Enclosed Switching Power Supply MORNSUN® LM100-20Bxx, LM100-20Bxx-C, LM100-20Bxx-Q Series


Dimensions and Recommended Layout

LM100-20Bxx, LM100-20Bxx-Q Series

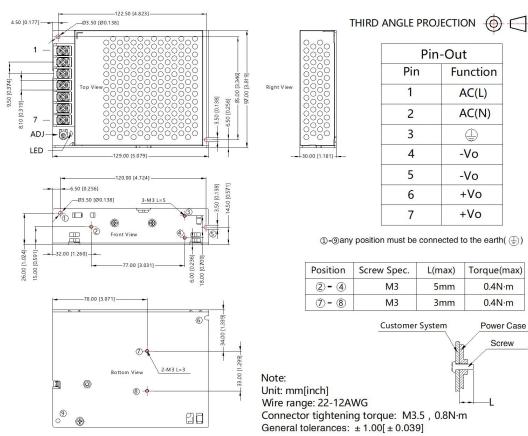

LM100-20Bxx-C Series

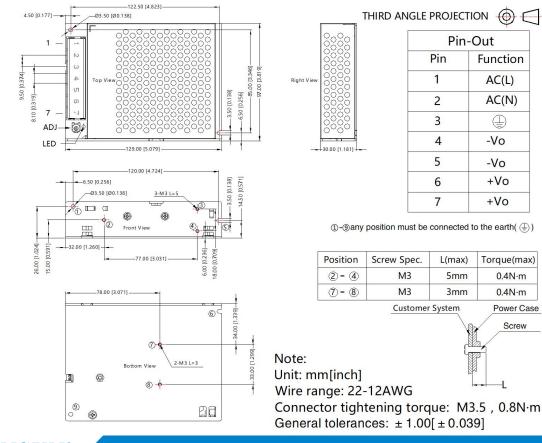

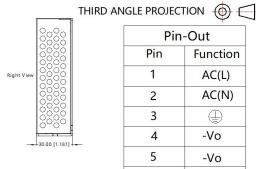

	~	
Pin-	-Out	
Pin	Function	
1	AC(L)	
2	AC(N)	
3	(
4	-Vo	
5	-Vo	
6	+Vo	
7	+Vo	

①-@any position must be connected to the earth((4))

Position	Screw Spec.	L(max)	Torque(max)
2-4	M3	5mm	0.4N·m
7-8	M3	3mm	0.4N·m
	Customer	r System	Power Case
		\sh	Screw
		r III	a_/
			2
m[inch]			
ange: 22-	-12AWG	l -	L_

MORNSUN®

AC/DC 100W Enclosed Switching Power Supply MORNSUN® LM100-20Bxx, LM100-20Bxx-C, LM100-20Bxx-Q Series



Note:

- 1. For additional information on Product Packaging please refer to www.mornsun-power.com. Packaging bag number: 58220120;
- 2. Unless otherwise specified, parameters in this datasheet were measured under the conditions of Ta=25°C, humidity<75%RH with nominal input voltage and rated output load;
- 3. The ambient temperature derating of 5° C/1000m is needed for operating altitude greater than 2000m;
- 4. All index testing methods in this datasheet are based on our company corporate standards;
- 5. In order to improve the efficiency at high input voltage, there will be audible noise generated, but it does not affect product performance and reliability;
- 6. We can provide product customization service, please contact our technicians directly for specific information;
- 7. Products are related to laws and regulations: see "Features" and "EMC";
- 8. The out case needs to be connected to the earth of system when the terminal equipment in operating;
- 9. Our products shall be classified according to ISO14001 and related environmental laws and regulations, and shall be handled by qualified
- 10. The power supply is considered a component which will be installed into a final equipment. All EMC tests should be confirmed with the final equipment. Please consult our FAE for EMC test operation instructions.

Mornsun Guangzhou Science & Technology Co., Ltd.

Address: No. 5, Kehui St. 1, Kehui Development Center, Science Ave., Guangzhou Science City, Huangpu District, Guangzhou, P. R. China Tel: 86-20-38601850 Fax: 86-20-38601272 E-mail: info@mornsun.cn www.mornsun-power.com

MORNSUN®