



Power Supply; 24 V/5 ... 15 VDC

Item No.: 750-623



Power Supply; 24 V/5 ... 15 VDC

Marking

RoHS
Compliant

Business data

Supplier	WAGO
Item no.	750-623
GTIN / EAN	4017332395793
Content	1
Order amount	1
Customer item number	

Notes

*Item description:*The I/O module generates 5V, 8V, 10V, 12V and 15V DC output voltages from the 24VDC input voltage. The output voltage is selected by a DIP switch located on the side of the module. The output voltage can be tapped at the CAGE CLAMP® connections. The adjoining modules are also supplied with this voltage level via the power jumper contacts. Status LEDs indicate the module's operating state. The input voltage and the output voltage are not electrically isolated.

Technical data


Miscellaneous


Color	lichtgrau
Conformity marking	CE

Technical data	
<i>Power supply</i>	<i>24 V DC (-15 % ... +20 %)</i>
<i>Output current</i>	<i>0.5 A (1 A at 5 V)</i>
<i>Output voltage</i>	<i>5 V, 8 V, 10 V, 12 V, 15 V DC</i>
<i>Degree of protection</i>	<i>IP20</i>
<i>Connection technology</i>	<i>CAGE CLAMP®</i>
<i>Solid conductor</i>	<i>0.08 ... 2.5 mm² / 28 ... 14 AWG</i>
<i>Fine-stranded conductor</i>	<i>0.08 ... 2.5 mm² / 28 ... 14 AWG</i>
<i>Strip length</i>	<i>8 ... 9 mm / 0.31 ... 0.35 Inch</i>
<i>Weight [g]</i>	<i>53.768 [g]</i>
<i>Width</i>	<i>12 mm / 0.472 Inch</i>
<i>Height</i>	<i>69.8 mm / 2.748 Inch</i>
<i>Height from upper-edge of DIN-35 rail</i>	<i>62.6 mm / 2.465 Inch</i>
<i>Depth</i>	<i>100 mm / 3.937 Inch</i>
<i>Storage temperature</i>	<i>-25 °C ... +85 °C</i>
<i>Relative air humidity (no condensation) [%]</i>	<i>95 [%]</i>
<i>Type of mounting</i>	<i>DIN-35 x 15 carrier rail</i>
<i>Operating temperature</i>	<i>0°C ... +55°C</i>
<i>EMC emission of interference</i>	<i>acc. to EN 61000-6-3, marine applications</i>
<i>EMC immunity to interference</i>	<i>acc. to EN 61000-6-2, marine applications</i>
<i>Shock resistance</i>	<i>acc. to IECacc. to IEC 60068-2-27</i>
<i>Vibration resistance</i>	<i>acc. to IECacc. to IEC 60068-2-6</i>

Images & drawings



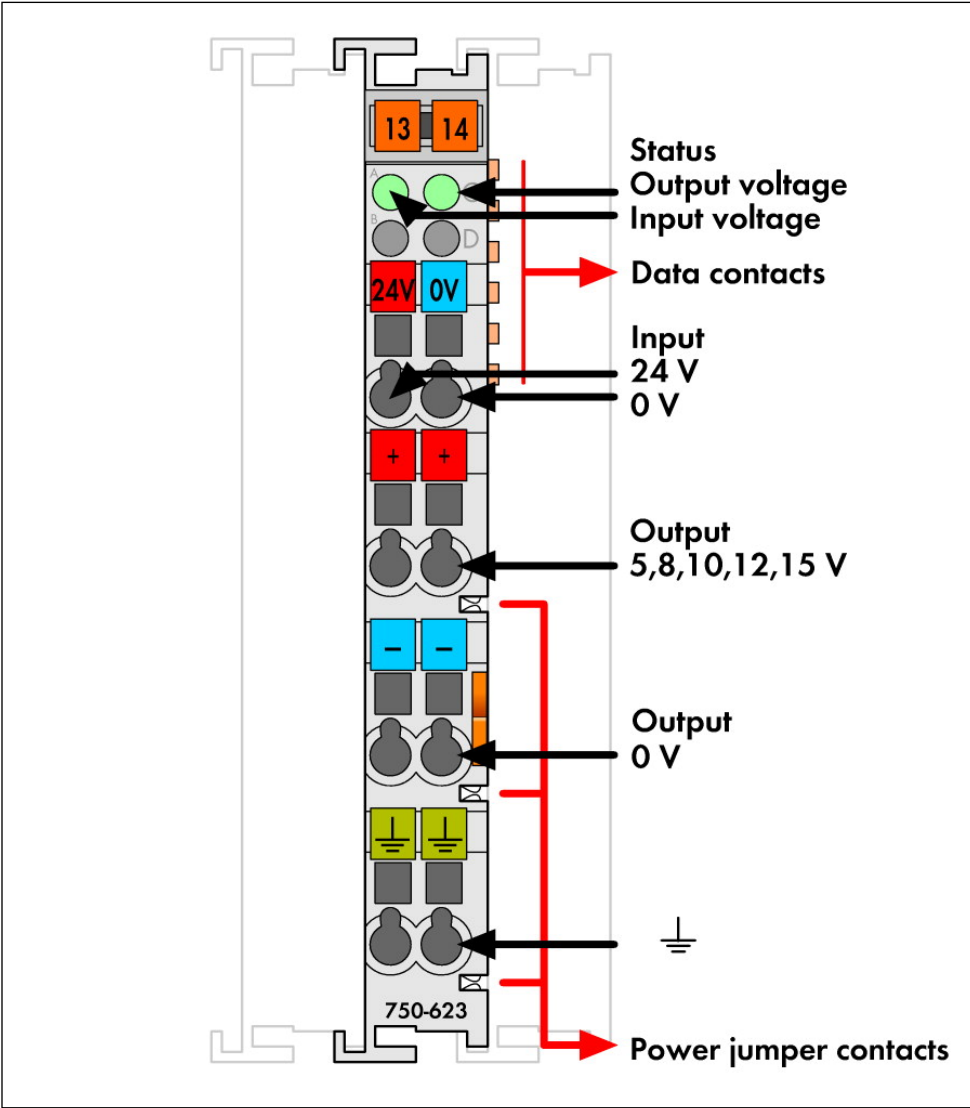

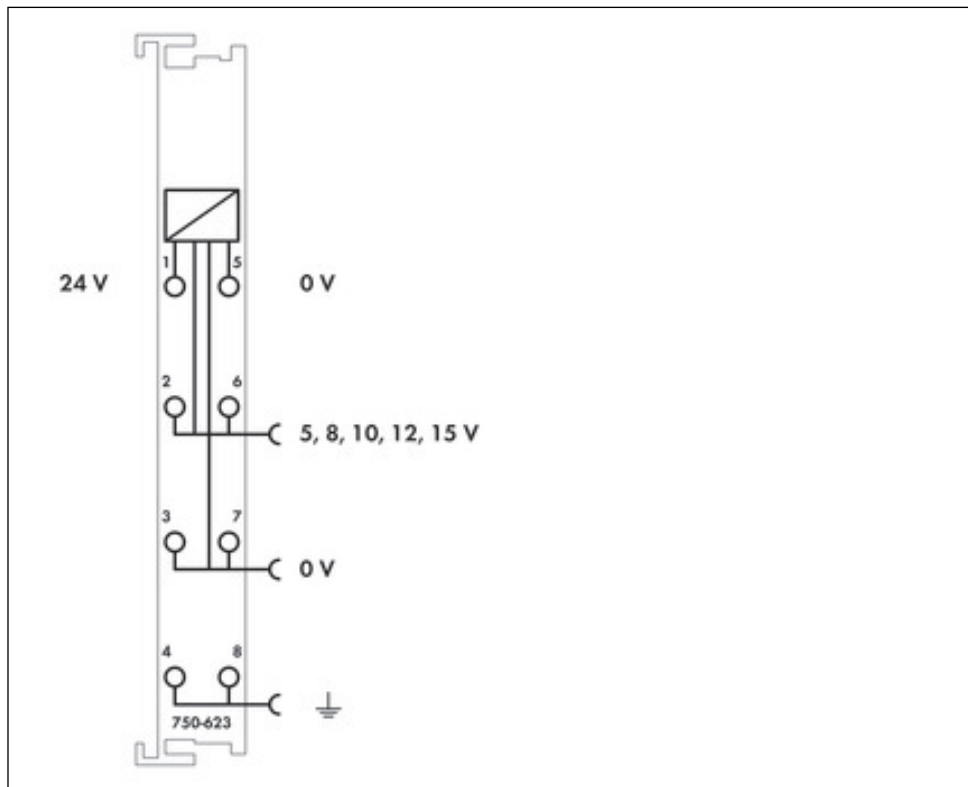

Address

WAGO Kontakttechnik GmbH & Co. KG

Hansastr. 27

32423 Minden

Telefon: 0571/887-0

Fax: 0571/887-169

<http://www.wago.com>

© WAGO Kontakttechnik GmbH & Co. KG

Technische Änderungen und Irrtümer vorbehalten.