



**Male connector; with CAGE CLAMP® connection; for flying leads;  
Pin spacing 5 mm / 0.197 in; 7-pole**

Item No.: 769-607



Male connector; with CAGE CLAMP® connection; for flying leads; Pin spacing 5 mm / 0.197 in; 7-pole

## Marking

RoHS ✓  
Compliant

## Business data

Supplier	WAGO
Item no.	769-607
GTIN / EAN	4044918521277
Content	1
Order amount	25
Customer item number	

## Notes


## Technical data


### Miscellaneous

No. of poles	7
Pin spacing	5 mm / 0.197 in
Total number of connection points	7
Total number of potentials	7
Color	gray
Rated voltage (III / 3) [V]	500 [V]

<b>Technical data</b>	
<i>Rated impulse voltage (III / 3) [kV]</i>	6 [kV]
<i>Rated current [A]</i>	32 [A]
<i>Connection technology</i>	CAGE CLAMP®
<i>Number of connection points connector</i>	1
<i>Actuation type</i>	Operating tool
<i>Connectable conductor materials</i>	Copper
<i>Nominal cross section</i>	4 mm <sup>2</sup>
<i>Solid conductors, tool-operated termination</i>	0.08 ... 4 mm <sup>2</sup> / 28 ... 12 AWG
<i>Fine-stranded conductors, tool-operated termination</i>	0.08 ... 4 mm <sup>2</sup> / 28 ... 12 AWG
<i>Strip length</i>	8 ... 9 mm / 0.31 ... 0.35 inch
<i>Type of wiring</i>	Front-entry wiring
<i>Insulating material</i>	Polyamide 66 (PA 66)
<i>Fire load [MJ]</i>	0.416 [MJ]
<i>Weight [g]</i>	20.735 [g]
<i>Width</i>	38.6 mm / 1.52 in.
<i>Height</i>	18.3 mm / 0.72 in.
<i>Depth</i>	40.2 mm / 1.583 in.

Images & drawings

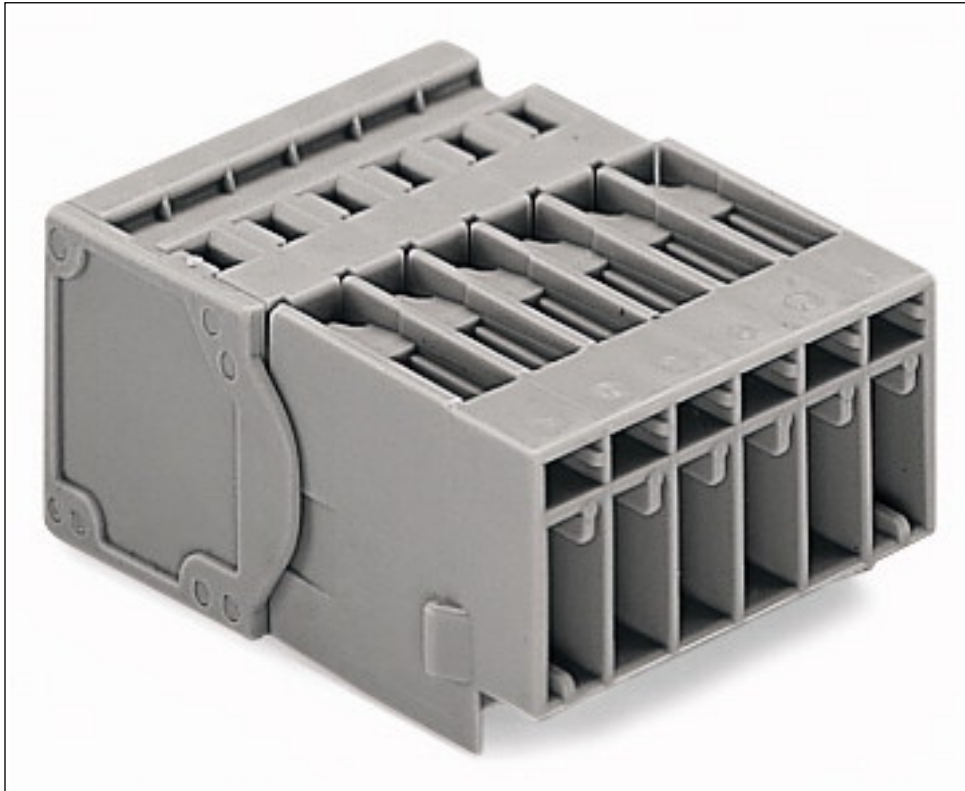

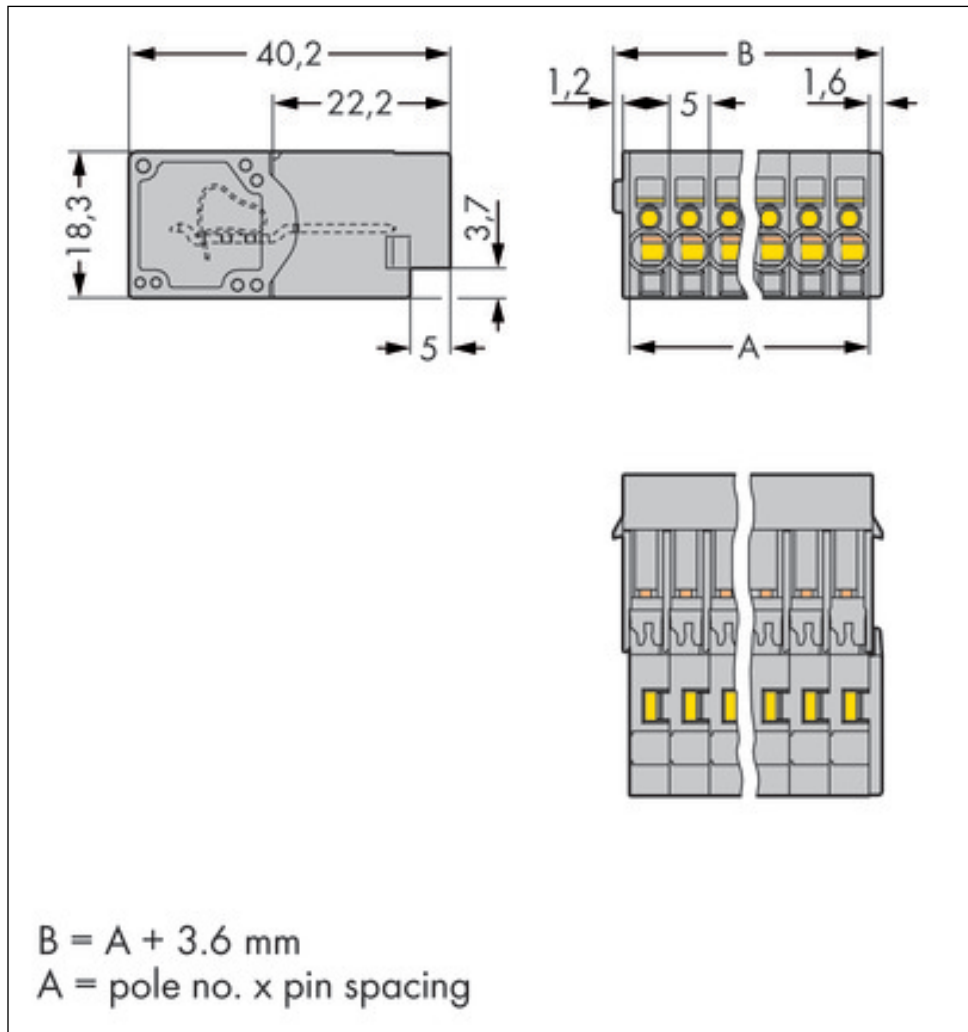

#### Address

WAGO Kontakttechnik GmbH & Co. KG

Hansastr. 27

32423 Minden

Telefon: 0571/887-0

Fax: 0571/887-169

<http://www.wago.com>

© WAGO Kontakttechnik GmbH & Co. KG

Technische Änderungen und Irrtümer vorbehalten.