



PUSH WIRE® connector for junction boxes; 5-conductor terminal block

Item No.: 273-101



PUSH WIRE® connector for junction boxes; 5-conductor terminal block

Marking

RoHS ✓
Compliant

Business data

Supplier	WAGO
Item no.	273-101
GTIN / EAN	4044918484343
Content	1
Order amount	100
Customer item number	

Notes

Safety information 2: When using conductors of exclusively the same cross section, 0.5 mm²/AWG 20 is also possible.

Technical data


Miscellaneous

Total number of connection points	5
Total number of potentials	1
Color	gray
Rated voltage (II / 2) [V]	400 [V]
Rated impulse voltage (II / 2) [kV]	4 [kV]

Technical data	
<i>Rated current [A]</i>	<i>18 [A]</i>
<i>Connection technology</i>	<i>PUSH WIRE®</i>
<i>Number of connection points connector</i>	<i>5</i>
<i>Actuation type</i>	<i>Push-in</i>
<i>Connectable conductor materials</i>	<i>Copper</i>
<i>Solid conductors, tool-operated termination</i>	<i>0.75 ... 1.5 mm² / 18 ... 16 AWG</i>
<i>Strip length</i>	<i>10 ... 13 mm / 0.39 ... 0.51 inch</i>
<i>Type of wiring</i>	<i>Side-entry wiring</i>
<i>Fire load [MJ]</i>	<i>0.042 [MJ]</i>
<i>Weight [g]</i>	<i>2.414 [g]</i>
<i>Width</i>	<i>17.5 mm / 0.689 in.</i>
<i>Height</i>	<i>8.6 mm / 0.339 in.</i>
<i>Depth</i>	<i>18.5 mm / 0.728 in.</i>
<i>Safety information 1</i>	<i>In grounded power lines</i>

Images & drawings



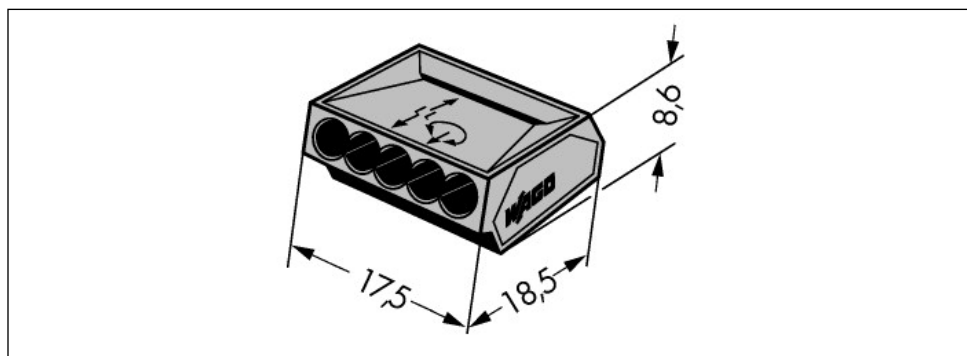

Address

WAGO Kontakttechnik GmbH & Co. KG

Hansastr. 27

32423 Minden

Telefon: 0571/887-0

Fax: 0571/887-169

<http://www.wago.com>

© WAGO Kontakttechnik GmbH & Co. KG

Technische Änderungen und Irrtümer vorbehalten.